


NORLYS HELLVIK MINI 2443


IP 65 | IK 10 | LED | DALI2 TD

Hellvik Mini
2443XX0009
26.10.2026 v.09.12
www.norlys.no

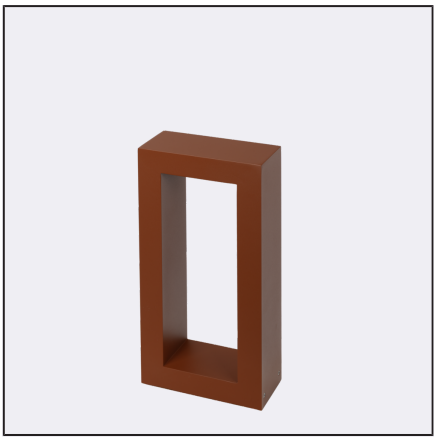

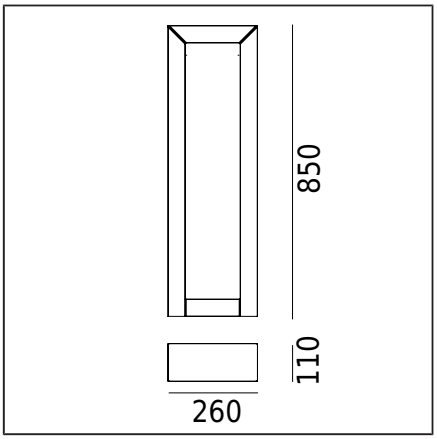

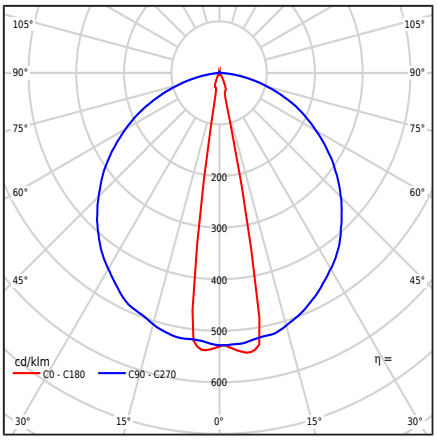

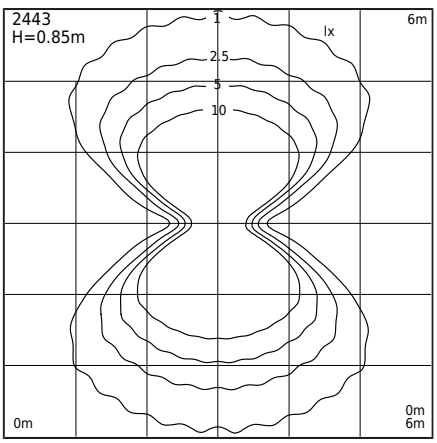

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	A fixture with contemporary design. For garden lighting, private areas, and other architectural applications.

General information

Materials	Extruded aluminum profile, powder coated. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	According to the attached installation instructions. Other accessories should be purchased separately.
Terminal	Connection terminals: max 3x2.5mm². Possibility of looping through the fixture max 3x1.5mm². Cable with a round sheath, diameter max ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control in the system: DALI2/TD.
Luminaire dimensions [cm]	26cm x 11cm x 55cm

Technical data

LED module	Cree DK180501 V8 JB2835 3V 4K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2-TD (User manual)
Light source wattage	5,6W
Luminaire wattage	8,7W
Lamp luminous flux	1030lm
Luminaire luminous flux	518lm
Luminous intensity of the luminaire	283cd
Efficiency of the luminaire	59,5lm/W
ULOR	0.8%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF>0,89
THD factor	13%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- for a different luminous flux value
- with a surge protection device (SPD)
- for a different fixture color (according to the RAL color palette)
- for a different fixture height

Terms of sale and additional information are available upon agreement with the Norlys Sales Department.

Inrush current	6,7A / 2,4µs

Accessories sold separately

199GA0S09	Adapter for concrete foundation
199GA0009	Ground anchor

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED Management System ISO 9001:2015 IATF 16949:2016 www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please read the instructions attached to the lamp. Assembly and service work should be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.

HELLVIK MINI 2443



Indexes

Index	Color	RAL
2443AL	ALUMINUM	9006
2443BL	BLACK	9005
2443CG	CEMENT GREY	7033
2443CB	COPPER BROWN	8004
2443CS	CORTEN STEEL	approx. 8011
2443GM	GRAIN MINERAL	-
2443GR	GRAPHITE	7016
2443GB	GREY BEIGE	7006
2443WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the assembly, please read the instructions attached to the lamp. Assembly and service work should be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.