


NORLYS HELLVIK MINI 2444


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Hellvik Mini
2444XX0009
16.11.2026 v.09.13
www.norlys.no

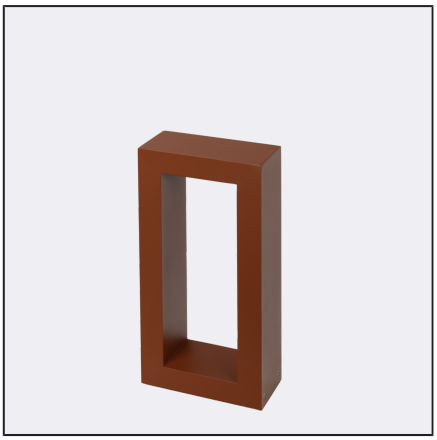

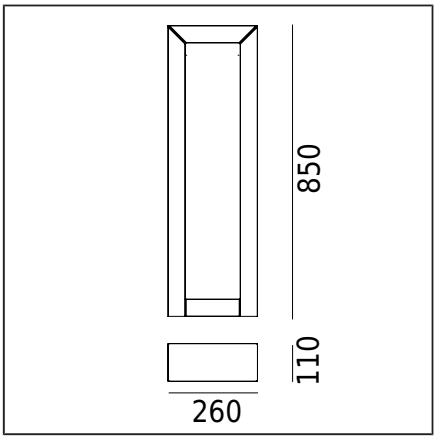

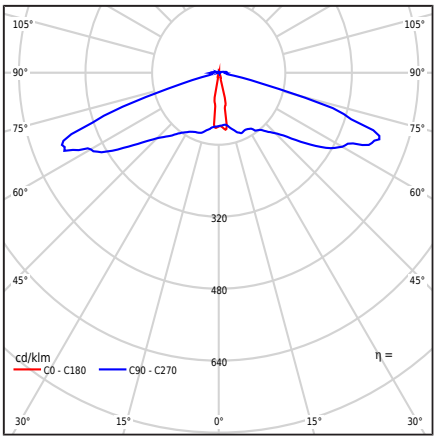

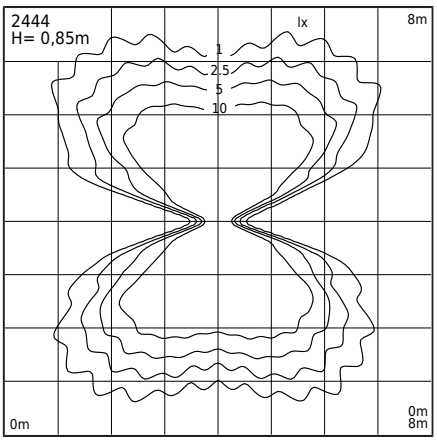

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Lens VSM CS15763 STRADA 2x2MX-8-VSM
Characteristics of the luminaire	A fixture with contemporary design. Suitable for lighting gardens, private areas, and other architectural applications.

General information

Materials	Extruded aluminum profile, powder coated. The outer hermetic lens - transparent PMMA plastic Silicone gasket.
Mounting method	According to the attached assembly instructions. Other accessories must be purchased separately.
Terminal	Terminal connections: max 3x2.5mm². Capability to connect fixture in a loop max 3x1.5mm². Cable in a round sheath with a diameter max ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire dimensions [cm]	26cm x 11cm x 55cm

Technical data

LED module	Cree DK200402 V1 XTE-HE 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	5,6W
Luminaire wattage	7,2W
Lamp luminous flux	1030lm
Luminaire luminous flux	469Mlm
Luminous intensity of the luminaire	347cd
Efficiency of the luminaire	65,1lm/W
ULOR	2%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	>109 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,89
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class G / EPREL

Optionally, the fixture is also available:
- for a different luminous flux value
- in a version with a surge protection device (SPD)
- for a different fixture color (according to the RAL color palette)
- for a different fixture height

Terms of sale and other information, to be agreed with the Sales Department of Norlys.

Accessories sold separately

199GA0S09	Adapter for concrete foundation
199GA0009	Ground anchor

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please refer to the instructions included with the fixture. Assembly and service work should be carried out by a person with the appropriate authorization and qualifications, in accordance with current regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

HELLVIK MINI 2444

Indexes

Index	Color	RAL
2444AL	ALUMINUM	9006
2444BL	BLACK	9005
2444CG	CEMENT GREY	7033
2444CB	COPPER BROWN	8004
2444CS	CORTEN STEEL	approx. 8011
2444GM	GRAIN MINERAL	-
2444GR	GRAPHITE	7016
2444GB	GREY BEIGE	7006
2444WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
2011/65/UE

Before starting the assembly, please refer to the instructions included with the fixture. Assembly and service work should be carried out by a person with the appropriate authorization and qualifications, in accordance with current regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.