


NORLYS HELLVIK MINI 2446


IP 65 | IK 08 | AC 220-240V 50-60Hz | LED | DALI2 TD

Hellvik Mini
2446XX0009
16.11.2026 v.09.12
www.norlys.no

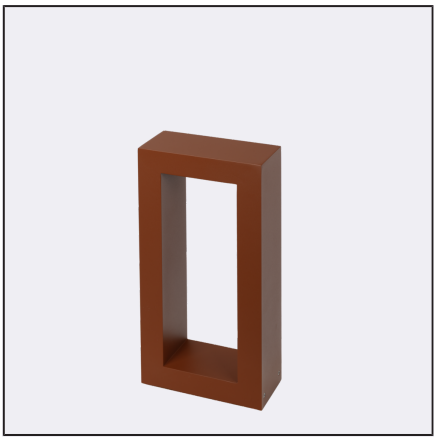

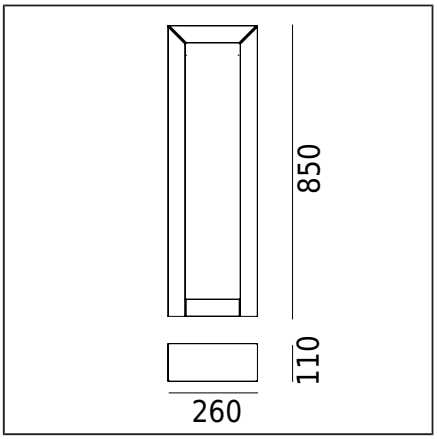

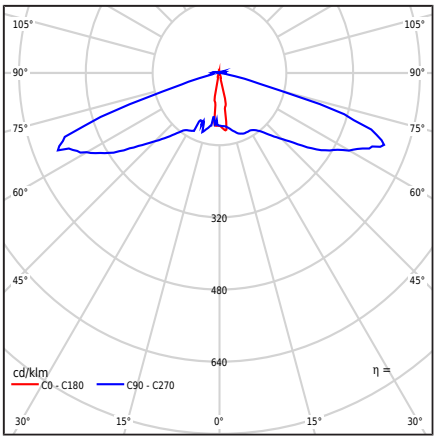

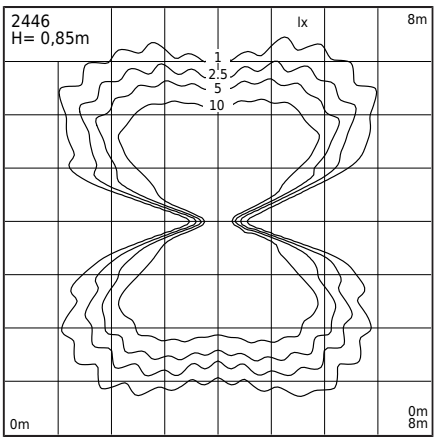

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Lens VSM CS15763 STRADA 2x2MX-8-VSM
Characteristics of the luminaire	A fixture with contemporary design. For lighting gardens, private areas, and other architectural applications.

General information

Materials	Extruded aluminum profile, powder coated. The outer hermetic lens - transparent PMMA plastic Silicone gasket.
Mounting method	According to the enclosed installation instructions. Other accessories must be purchased separately.
Terminal	Connection terminals: max 3x2.5mm². Possibility of looping the luminaire with max 3x1.5mm². Round cable with a maximum diameter of ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control in the system: DALI2/TD.
Luminaire dimensions [cm]	26cm x 11cm x 55cm

Technical data

LED module	Cree DK200402 V1 XTE-HE 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2-TD (User manual)
Light source wattage	5,6W
Luminaire wattage	7,5W
Lamp luminous flux	1030lm
Luminaire luminous flux	508lm
Luminous intensity of the luminaire	382cd
Efficiency of the luminaire	67,7lm/W
ULOR	2%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	>109 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,89
THD factor	<11%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class G / EPREL

Optionally, the fixture is also available:
- for a different luminous flux value
- in a version with surge protection device (SPD)
- for a different fixture color (according to the RAL color palette)
- for a different fixture height

Terms of sale and other information, upon agreement with the Sales Department of Norlys.

Inrush current	10.1A / 16µs

Accessories sold separately

199GA0S09	Adapter for concrete foundation
199GA0009	Ground anchor

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED Management System ISO 9001:2015 IATF 16949:2016 www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, familiarize yourself with the instructions attached to the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.

HELLVIK MINI 2446



Indexes

Index	Color	RAL
2446AL	ALUMINUM	9006
2446BL	BLACK	9005
2446CG	CEMENT GREY	7033
2446CB	COPPER BROWN	8004
2446CS	CORTEN STEEL	approx. 8011
2446GM	GRAIN MINERAL	-
2446GR	GRAPHITE	7016
2446GB	GREY BEIGE	7006
2446WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the installation, familiarize yourself with the instructions attached to the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.