


NORLYS HITRA 2461


IP 65 | IK 10 | LED | DALI2 | AC 220-240V 50-60Hz

Hitra 2461XX0009
16.09.2026 v.09.13
www.norlys.no

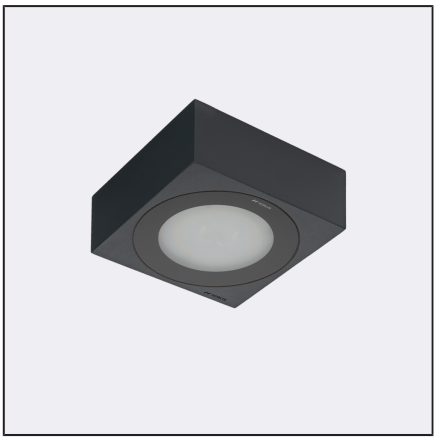

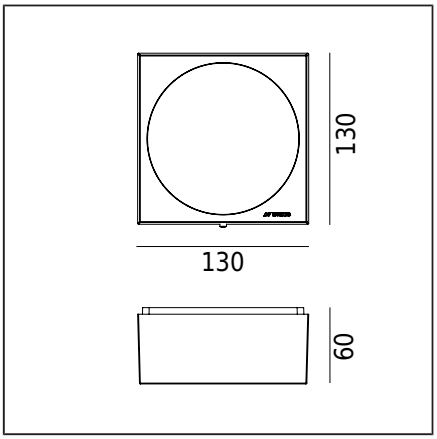

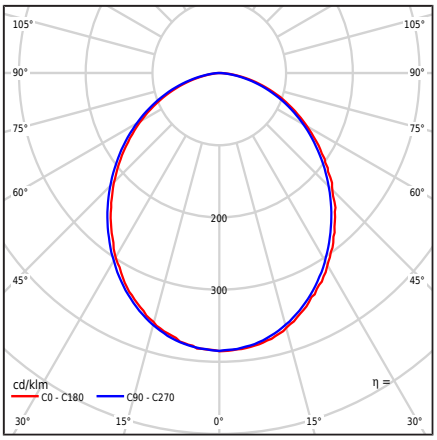

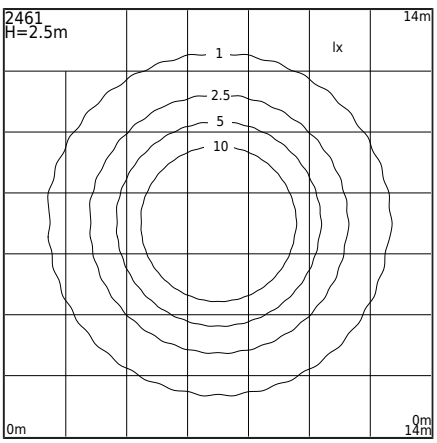

Type of luminaire

Type of luminaire	Ceiling fixture.
Photometric body	Symmetrical light directed downwards.
Characteristics of the luminaire	A fixture with a wide range of applications mounted on horizontal surfaces, including lighting: wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - safety glass, satin. Silicone gasket.
Mounting method	Fixture mounting: 2 holes ø5mm spacing 63x112mm.\nAccording to the attached installation instructions.
Terminal	Terminal connections: max 5x2.5mm², option to loop the luminaire max 5x1.5mm². Round cable with a diameter in the range ø7...10.5 mm
Type of light source	LED module, DALI / TD electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control in the system: DALI2/TD.
Luminaire weight net / gross	1,08kg / 1,28kg
Box dimensions [cm]	16cm x 14cm x 7cm
Luminaire dimensions [cm]	13cm x 13cm x 6cm

Technical data

Driver	Yes
Driver durability	100000h
Light source wattage	11,5W
Luminaire wattage	14,5W
Lamp luminous flux	1995lm
Luminaire luminous flux	1024lm
Efficiency of the luminaire	70,6lm/W
ULOR	0%
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-25...+65°C
This product contains light source of energy efficiency class	C
Inrush current	6.7A/2.4us

Maximum number of luminaires of this type per MCB:

B 10A: 46, B 16A: 74, C 10A: 74, C 16A: 119

Spare parts

ZN2461XX0009	Service set LED
ZS2461XX0009	Service set power supply

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please familiarise yourself with the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire.

Indexes

Index	Color	RAL
2461AL	ALUMINUM	9006
2461BL	BLACK	9005
2461CG	CEMENT GREY	7033
2461CB	COPPER BROWN	8004
2461CS	CORTEN STEEL	approx. 8011
2461GR	GRAPHITE	7016
2461GB	GREY BEIGE	7006
2461WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please familiarise yourself with the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire.