


NORLYS HITRA 2462


IP 65 | IK 10 | LED | DALI2 | AC 220-240V 50-60Hz

Hitra 2462XX0009
16.09.2026 v.09.13
www.norlys.no

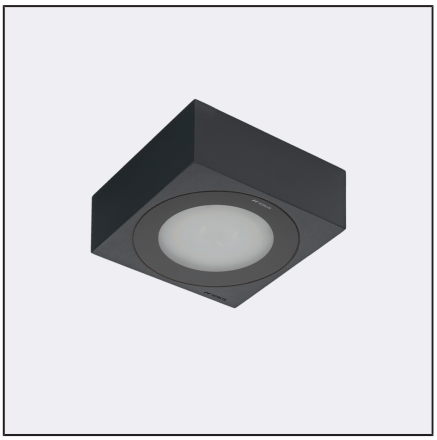

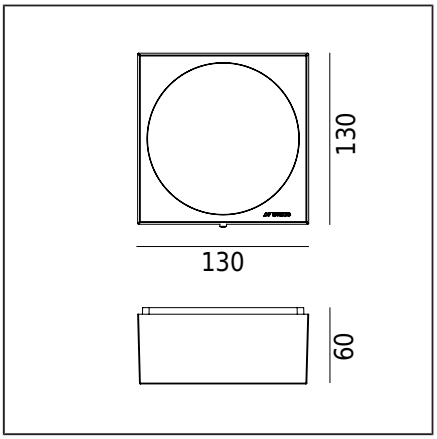

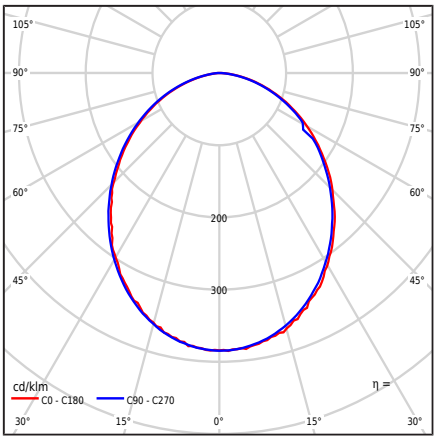

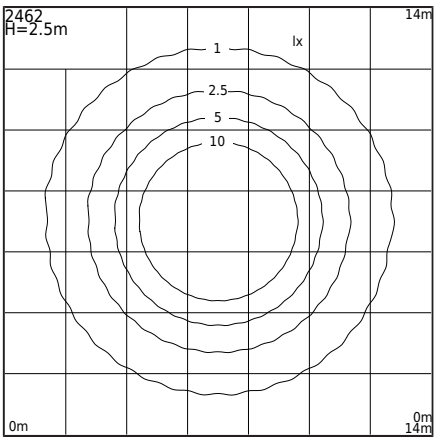

Type of luminaire

Type of luminaire	Ceiling fixture.
Photometric body	Symmetrical light directed downwards.
Characteristics of the luminaire	A fitting with a wide range of applications mounted on horizontal surfaces, including lighting of: wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - safety glass, satin. Silicone gasket.
Mounting method	Fixture mounting: 2 holes ø5mm spacing 63x112mm. According to the enclosed installation instructions.
Terminal	Connection terminals: max 5x2.5mm², possibility to connect the fixture in a loop max 5x1.5mm². Cable in a circular sheath with a diameter in the range ø7...10.5 mm
Type of light source	LED module, DALI / TD electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control in the system: DALI2/TD.
Luminaire weight net / gross	1,08kg / 1,28kg
Box dimensions [cm]	16cm x 14cm x 7cm
Luminaire dimensions [cm]	13cm x 13cm x 6cm

Technical data

LED module	Cree DK210704 V2 JB2835 3V 4K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	11,5W
Luminaire wattage	14,5W
Lamp luminous flux	2201lm
Luminaire luminous flux	1071lm
Efficiency of the luminaire	73,9lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-25...+65°C
This product contains light source of energy efficiency class C / EPREL	
Inrush current	6.7A/2.4us

Maximum number of luminaires of this type per MCB:

B 10A: 46, B 16A: 74, C 10A: 74, C 16A: 119

Spare parts

ZN2462XX0009	Service set LED
ZS2462XX0009	Service set power supply

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please read the instructions attached to the lighting fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation, which may occur in the fixtures, is a natural phenomenon and does not affect the deterioration of the quality of the fixture.

HITRA 2462



Indexes

Index	Color	RAL
2462AL	ALUMINUM	9006
2462BL	BLACK	9005
2462CG	CEMENT GREY	7033
2462CB	COPPER BROWN	8004
2462CS	CORTEN STEEL	approx. 8011
2462GR	GRAPHITE	7016
2462GB	GREY BEIGE	7006
2462WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please read the instructions attached to the lighting fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation, which may occur in the fixtures, is a natural phenomenon and does not affect the deterioration of the quality of the fixture.