
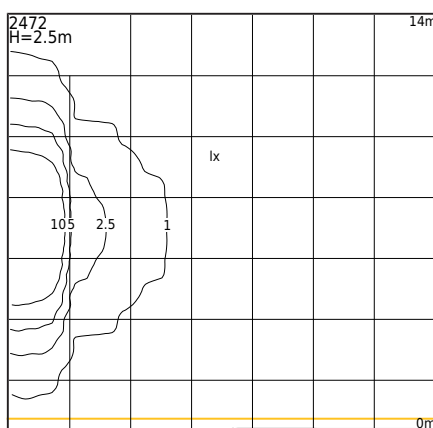
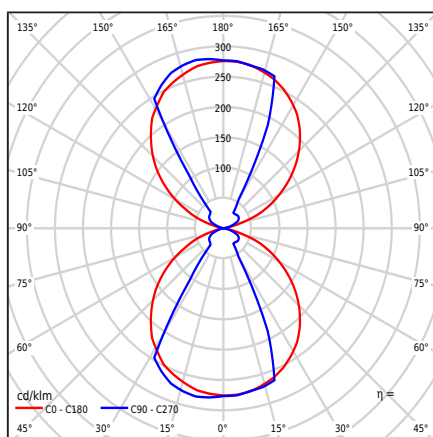


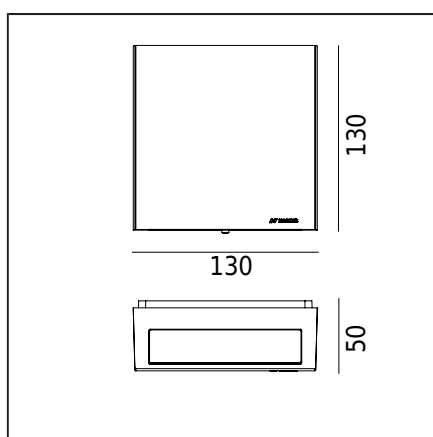

Type of luminaire

Photometric body Two-sided diffused light

Characteristics of the luminaire A fixture with a wide range of applications, including lighting: walls, facades, and other architectural concepts.

General information

Materials Powder painted aluminum cast. Lampshade - safety glass, transparent. Silicone gasket.

Mounting method Mounting of the fixture: 2 holes ø5mm with a spacing of 63x112mm. In accordance with the attached installation manual.

Terminal Connection terminals: max 5x2.5 mm², possibility of connecting the fitting in a loop max 5x1.5 mm². Cable in a round sheath with a diameter in the range ø7...10.5 mm.

Type of light source LED module, DALI / TD electronic power supply Replaceable light source by a professional. Replaceable control gear by a professional.

Light control Light control in the system: DALI2/TD.

Luminaire weight net / gross 0,85kg / 0,91kg

Box dimensions [cm] 16cm x 14cm x 5,5cm

Luminaire dimensions [cm] 13cm x 13cm x 5cm

Technical data

2 LED modules Cree DK180501 V8 JB2835 3V 4K (⌘ Datasheet)

Driver Yes

Driver durability 100000h

Luminaire wattage 15,3W

Luminaire luminous flux 1170lm

Efficiency of the luminaire 76,5lm/W

ULOR 50%

Color temperature 4000K

Colour consistency (McAdam ellipse) SDCM3

Flicker of light (Pst LM) ≤1

Strobe effect (SVM) ≤0.4

Colour rendering index CRI 80

L80TM-21 [wg LM-80] >102 000h

L90 TM-21 [wg LM-80] >52 600h

Power Factor luminaire PF>0.9

Ta Rated temperature +25°C

Ambient operating temp. range -20...+45°C

This product contains light sources of energy efficiency class **A** / **EPREL**

Inrush current 6.7A/2.4us

Maximum number of luminaires of this type per MCB:

B 10A: 46, B 16A: 74, C 10A: 74, C 16A: 119

Spare parts

ZN2472XX0009 Service set.

Files to download

Photometric LDT files

Photometric IES files

Manual



Indexes

Index	Color	RAL
2472AL	ALUMINUM	9006
2472BL	BLACK	9005
2472CG	CEMENT GREY	7033
2472CB	COPPER BROWN	8004
2472CS	CORTEN STEEL	approx. 8011
2472GR	GRAPHITE	7016
2472GB	GREY BEIGE	7006
2472WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.