
NORLYS LUND 275

AC 220-240V 50-60Hz | IP 55 | E27

Lund 275XX0309
16.09.2026 v.09.8
www.norlys.no



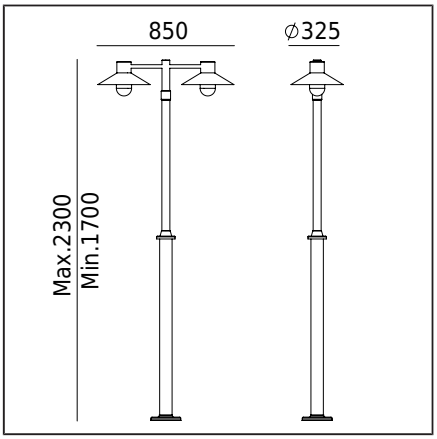

Type of luminaire

Photometric body	Light discovered
Characteristics of the luminaire	Scandinavian design luminaire, mounted on a telescopic lighting pole. Adjustable height 1700..2300mm. For lighting gardens, terraces and other architectural concepts.

General information

Materials	Hot-dip galvanized steel. Powder painted steel. Lens - clear polycarbonate, UV stabilized.
Mounting method	Fixing of the luminaire: 3 holes ø10,5mm, on a daimeter ø207mm every 120°. Set contains: Art. 2020 - luminaire, Art. 3009 - steel, hot-dip galvanized lighting pole, Art. 3011 - aluminum, powder coated lighting pole in black colour. Other accessories need to be purchased separately.
Terminal	Connection terminal: max 3x4mm² cable, possibility to connect luminaire in loop max 3x1,5mm². A round wire in the isolation with a diameter of max ø12,5mm.
Type of light source	Lamp E27 A55...A60
Luminaire dimensions [cm]	85cm x 32,5cm x 230cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 2 x 9W
Luminaire wattage	LED max 2 x 9W
ULOR	12%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

Possibility to order the luminaire with LED E27 Philips Master LEDbulb 806lm / 8,5W / 2700K (dimmable).

Accessories sold separately

405ZX0009	Concreting anchor
406ZX0009	Ground anchor

Spare parts

06240000	Lampshade - service kit

Files to download

Manual

Indexes

Index	Color	RAL
275BL	BLACK	9005
275GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.