

DYSTRYBUTOR E [UNI] 2901

AC 220-240V 50-60Hz | IP 54

Dystrybutor E [Uni]
2901XX0009
16.09.2026 v.09.17
www.norlys.no

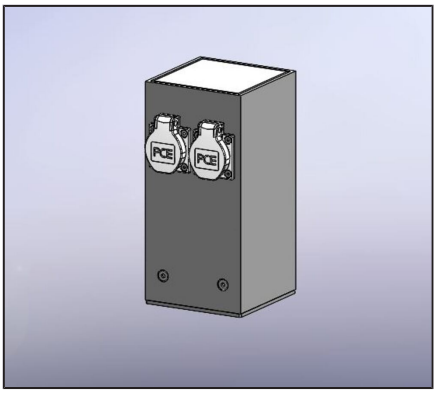

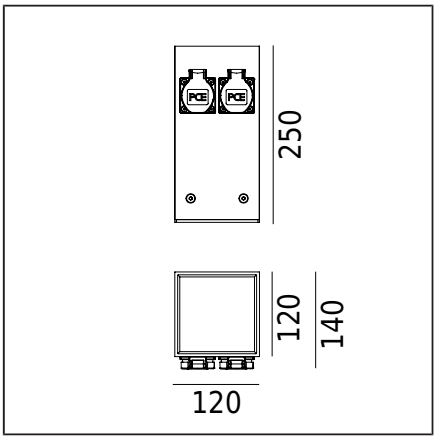

Type of luminaire

Characteristics of the luminaire	A fixture with contemporary design. Energy distributor equipped with: - two type E (Uni) 16A sockets

General information

Materials	Extruded aluminum profile, powder coated.
Mounting method	Fixture mounting: 4 holes ø7mm, spacing 64x64mm According to the attached installation instructions. Other accessories must be purchased separately.
Terminal	Terminal clamps: max 3x4mm², possibility to connect the lamp in a loop max 3x4mm². Cable in a circular sheath with a maximum diameter of ø12.5mm.
Luminaire weight net / gross	2,02kg / 2,35kg
Box dimensions [cm]	35cm x 17,5cm x 17,5cm
Luminaire dimensions [cm]	25cm x 12cm x 14cm

Technical data

Ambient operating temp. range	TA MAX=+35°C

Optionally, the fixture is also available:
- for a different fixture color (according to the RAL color palette)
Terms of sale and other information, upon agreement with the Norlys Sales Department.

Accessories sold separately

2934ZX0009	Concreting anchor

Files to download

Manual

Indexes

Index	Color	RAL
2901AL	ALUMINUM	9006
2901BL	BLACK	9005
2901CG	CEMENT GREY	7033
2901CB	COPPER BROWN	8004
2901GR	GRAPHITE	7016
2901GB	GREY BEIGE	7006
2901ST	STAINLESS STEEL	-
2901WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning the installation, refer to the manual included with the fixture. Installation and maintenance work must be carried out by individuals with the appropriate authorizations and qualifications, in compliance with the current regulations. Due to the dynamic development of lighting technology, additional information is provided upon the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture.