

NORLYS LAMPPOST 3004

EN40

Lamppost
3004XX0011
16.09.2026 v.11.32
www.norlys.no

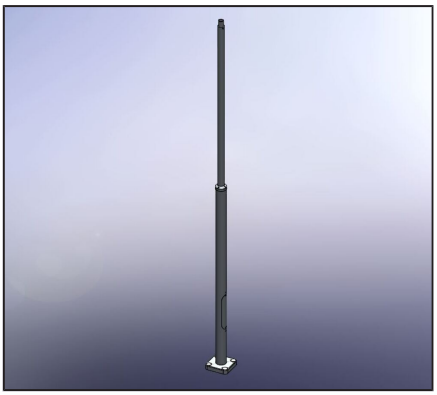

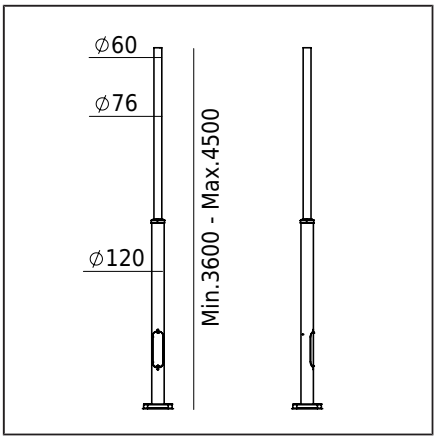

Type of accesory

Type of accessory	Lighting pole.
Characteristics of the accessory	Road lighting pole, telescopic with adjustable height 360-450 [cm], for fixtures with a mounting diameter Ø60mm, equipped with inspection doors. Intended for traffic areas - roads, sidewalks, paths, squares, parks, gardens, private areas, public utility areas. Meets the standards requirements: EN 40-31; EN 40-3-3.

General information

Materials	Extruded aluminum profile, powder coated. Base - powder painted aluminum cast.
Mounting method	Base dimensions: 276x276mm with 4 holes ø 23mm, spacing of 200x200mm. Mounting of the base to a prefabricated concrete foundation or to concreting anchors for self setting in concrete following the attached assembly instructions Accessories must be ordered separately
Terminal	According to the attached instructions. The pole is equipped with: revision door, PE cable connector
Rodzaj słupa	Telescopic pole
Pole weight net / gross	17,32kg / 20,18kg
Box dimensions [cm]	30,5cm x 33cm x 240cm
Pole dimensions [cm]	27,6cm x 27,6cm x 450cm
Side area of luminaire	0,45m^2

Accessories sold separately

3060GA0009	Reduction
3060XX0010	Reduction
3061XX0009	Reduction
7663ZX0009	Concreting anchor
7664ZX0010	Concrete foundation
7672ZX0009	Concrete foundation

Files to download

Manual

Indexes

Index	Color	RAL
3004AL	ALUMINUM	9006
3004GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE