
NORLYS BOLOGNA 315

AC 220-240V 50-60Hz | IP 54 | E27

Bologna 315XX0010
16.09.2026 v.10.5
www.norlys.no



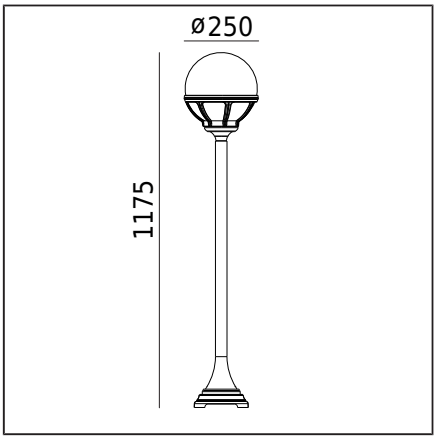

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light.
Characteristics of the luminaire	Classic type luminaire. For lighting gardens, terraces and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - plastic PMMA in milky color. Silicone gasket. EPDM cable gland.
Mounting method	Fixing of the luminaire: 2 holes ø5,5mm, spacing 90mm.
Terminal	Connection terminals: max 2x2,5mm². Possibility to connect in loop max 2x2,5mm². A round wire in the isolation with a diameter of ø7...10,5mm.
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	3,85kg / 4,05kg
Box dimensions [cm]	35cm x 32cm x 83,5cm
Luminaire dimensions [cm]	25cm x 25cm x 117,5cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

Possibility to order the luminaire with LED E27 Philips Master LEDbulb 806lm / 8,5W / 2700K (dimmable).

Accessories sold separately

307ZX0009	Concreting anchor

Spare parts

06360007	Lampshade - service kit

Files to download

Manual

Indexes

Index	Color	RAL
315BL	BLACK	9005
315WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with
applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not
impair the quality of the luminaire