
NORLYS BOLOGNA 365

AC 220-240V 50-60Hz | IP 54 | E27

Bologna 365XX0309
16.09.2026 v.09.5
www.norlys.no



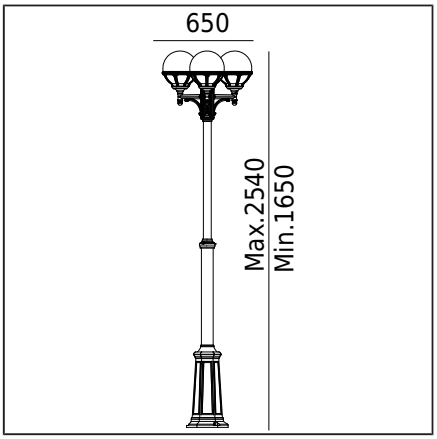

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Diffused light.
Characteristics of the luminaire	Classic design luminaire, mounted on a telescopic lighting pole. Adjustable height 1650..2540mm. For lighting gardens, terraces and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Mounting of the luminaire: 3 holes ø10.5mm, diameter ø240mm, every 120° Set includes: Art. 3026- luminaire Art. 3040- terminal Art. 3010- pole Other accessories must be ordered separately
Terminal	Connection terminal: max. 4x2,5mm² Possibility to connect luminaire in loop max 4x2,5mm² Round insulated cable with a diameter of max ø6...12,5mm
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	11,02kg / 14,55kg
Side area of luminaire	0,18m²

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 3x 9W
Luminaire wattage	LED max 3x 9W
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

Possibility to order the luminaire with LED E27 Philips Master LEDbulb 806lm / 8,5W / 2700K (dimmable).

Accessories sold separately

7668ZX0009	Concrete foundation
30101XX0011	Telescopic pole
3010XX0011	Telescopic pole
305ZX0009	Concreting anchor
306ZX0009	Ground anchor
108GA0309	Adapter for concrete foundation
6010GA0010	Mounting adapter

Spare parts

06360007	Lampshade - service kit

Files to download

Manual

Indexes

Index	Color	RAL
365BL	BLACK	9005
365WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.