

NORLYS COMO 370


AC 220-240V 50-60Hz | IP 54 | E27

Como 370XX0010
16.09.2026 v.10.7
www.norlys.no



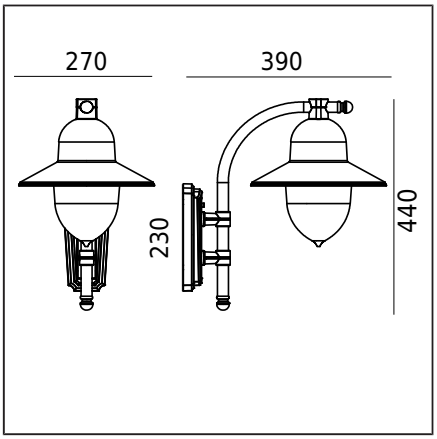

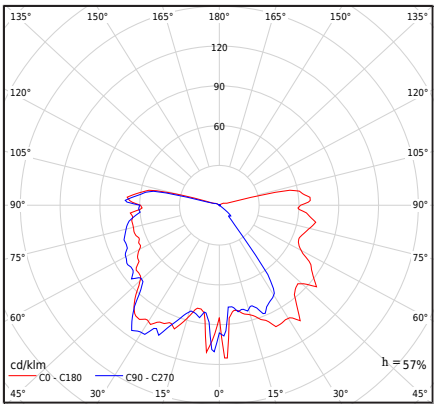

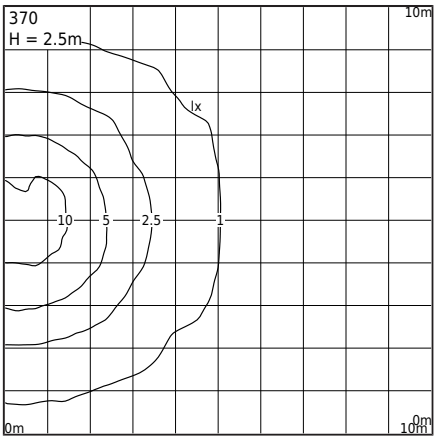

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Light discovered
Characteristics of the luminaire	Classic type wall-mounted luminaire. Possibility to install on corners of architectural objects.

General information

Materials	Powder painted aluminum cast. Lens - clear polycarbonate, UV stabilized. EPDM cable gland.
Mounting method	Fixing the luminaire: 4 holes ø5mm, spacing 25x140mm.
Terminal	Connection terminals: max 2x2,5mm². A round wire in the isolation with a diameter of max ø7...10,5mm.
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	2,3kg / 2,3kg
Box dimensions [cm]	26cm x 24cm x 49cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
ULOR	17%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
Possibility to order luminaire with LED E27 lamp Philips Master LEDbulb 806lm/ 8,5W/2700K (dimmable).	
BUG rating	B0-U3-G1

Accessories sold separately

152XX0009	Corner bracket

Spare parts

06370797	Lampshade - service kit

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
370BL	BLACK	9005
370WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.