

NORLYS LONDON 4133


AC 220-240V 50-60Hz | IP 54 | IK 07 | LED

London 4133XX0309
16.09.2026 v.09.8
www.norlys.no



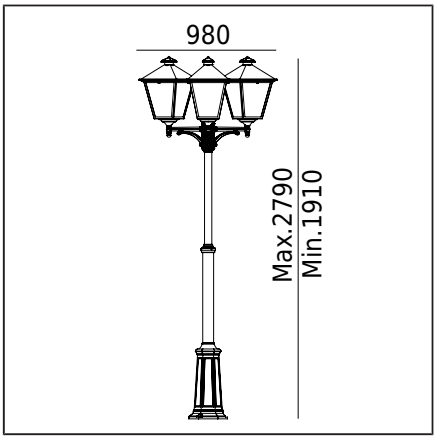

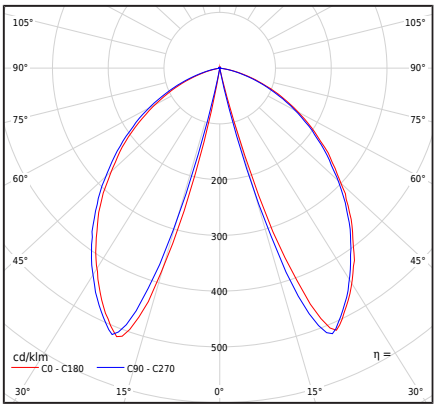

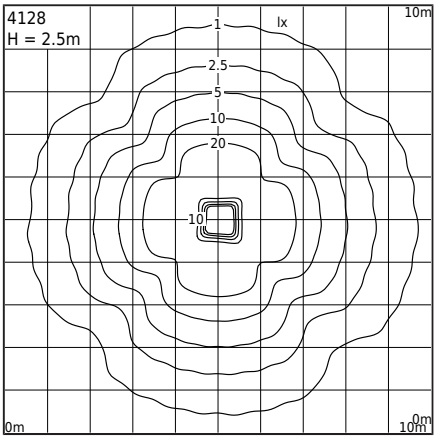

Type of luminaire

Type of luminaire	Pole luminaire (light construction).
Photometric body	Light discovered
Characteristics of the luminaire	A column lamp with a classic design for general use. A lighting pole (lightweight construction) designed for gardens, private areas, etc.

General information

Materials	Powder painted aluminum cast.
Mounting method	Mounting of the fixture: 3 holes ø10.5mm, on a diameter of ø240mm every 120°. Set composition: art. 4121 - lighting fixture art. 3040 - terminal art. 3010 - lighting pole. Other accessories must be ordered separately.
Terminal	Terminal blocks: max 4x2.5mm², possibility of connecting the fixture in a loop max 4x2.5mm². Cable in a round sheath with a diameter of ø7...12.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Luminaire weight net / gross	16,4kg / 22,7kg
Box dimensions [cm]	43cm x 30,5cm x 65cm
Luminaire dimensions [cm]	43cm x 30,5cm x 65cm

Technical data

LED module	Philips Fortimo DLM ES 1100/8xx G2 4K (Datasheet)
Light source wattage	3x9,5W
Luminaire wattage	3x9,5W
Lamp luminous flux	3300lm
Luminaire luminous flux	2271lm
Efficiency of the luminaire	79,7lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
Power Factor luminaire	PF>0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	3,01A/32,66µs
BUG rating	B1-U1-G0

Files to download

Manual

Indexes

Index	Color	RAL
4133BL	BLACK	9005
4133WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting installation, it is necessary to read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.