


NORLYS LONDON 4134

London 4134XX0309
02.11.2026 v.09.33
www.norlys.no



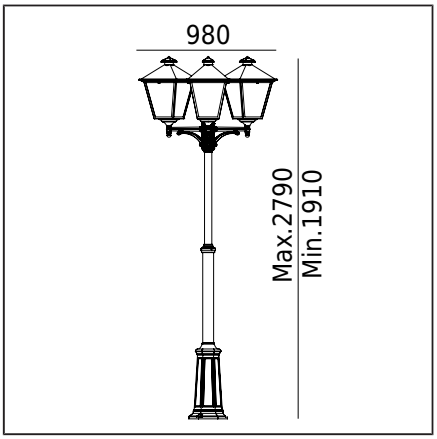

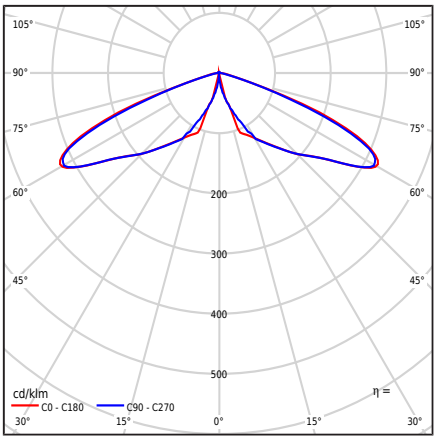

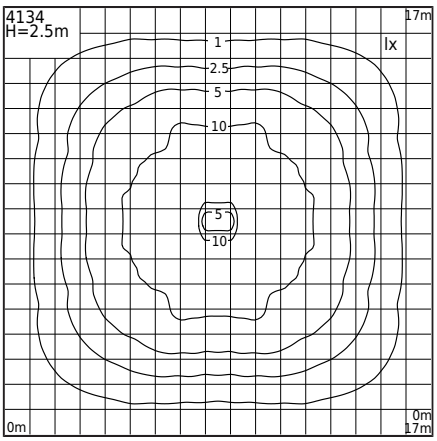

Type of luminaire

Type of luminaire	Pole luminaire (light construction).
Photometric body	Lens from Ledil type VSM (IESNA type V)
Characteristics of the luminaire	A luminaire with a classic design, mounted on a telescopic lighting column with an adjustable height of 1910...2790 mm. Used for illuminating gardens, parks, and other architectural concepts.

General information

Materials	Powder painted aluminum cast.
Mounting method	Fixture mounting: 3 holes ø10.5mm, on a ø240mm diameter, spaced 120° apart. Set composition: art. 4122 - lighting fixture art. 3040 - terminal art. 3010 - lighting pole. Other accessories should be ordered separately.
Terminal	Connection terminals: max 4x2.5mm². Cable with a round sheath with a diameter of ø7...12.5mm.
Type of light source	LED module, electronic power supply Replaceable light source by a professional. Replaceable control gear by a professional.
Luminaire weight net / gross	16,8kg / 23kg
Box dimensions [cm]	43cm x 30,5cm x 65cm
Luminaire dimensions [cm]	43cm x 30,5cm x 65cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 3K (Datasheet)
Driver	Yes
Driver durability	100000h
Luminaire wattage	3x13,4W
Luminaire luminous flux	5322lm
Efficiency of the luminaire	132,4lm/W
ULOR	0%
Color temperature	3000K
L90B10 [wg LM-80]	>100 000h
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
BUG rating	B1-U1-G0

Maximum number of luminaires of this type per MCB:

B 10A: 10, B 16A: 16, C 10A: 16, C 16A: 27

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
4134BL	BLACK	9005
4134WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Information on recommended light sources is based on manufacturers' data. We are not responsible for the completeness and validity of the offer, therefore we refer to the current technical information from the light source manufacturers. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the quality of the fixture.