


NORLYS LONDON 4141

London 4141XX0009
02.11.2026 v.09.2
www.norlys.no



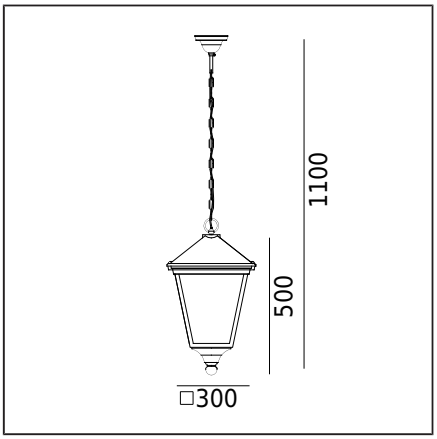

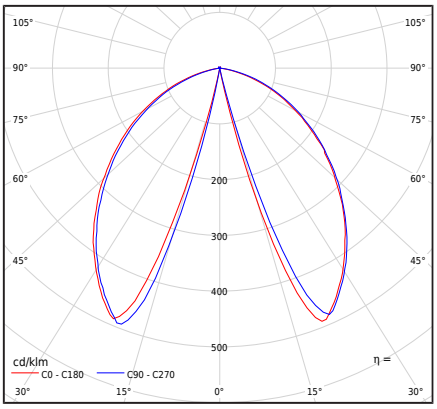

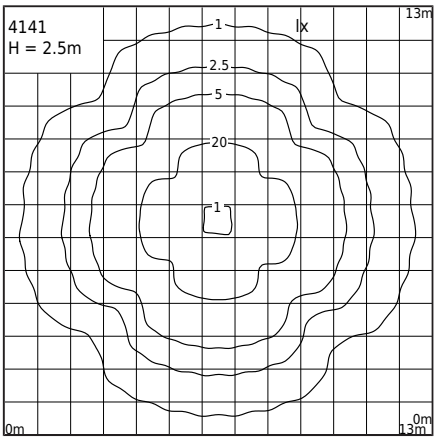

Type of luminaire

Type of luminaire	Pendant light.
Photometric body	Light discovered
Characteristics of the luminaire	Pendant fixture on a chain with classic design. For lighting gardens, terraces, and other architectural concepts.

General information

Materials	Powder painted aluminum cast.
Mounting method	Mounting of the fixture: ceiling hook
Terminal	Connection terminals, max 2x2.5mm². Round cable with diameter ø5...12mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Luminaire weight net / gross	3,55kg / 4,3kg
Box dimensions [cm]	44cm x 32,5cm x 54cm

Technical data

LED module	Philips Fortimo DLM ES 2000/8xx G2 4K (Datasheet)
Light source wattage	17,5W
Luminaire wattage	17,5W
Lamp luminous flux	1950lm
Luminaire luminous flux	1392lm
Efficiency of the luminaire	79,5lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
Power Factor luminaire	PF>0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	3,01A/32,66µs
BUG rating	B1-U1-G0

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
4141BL	BLACK	9005
4141WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873
PCC cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the assembly, it is necessary to read the instructions attached with the fixture. Due to the dynamic development of lighting technology, additional information is provided upon the customer's request. Condensation, which may occur in the fixtures, is a natural phenomenon and does not affect the deterioration of the fixture's quality.