


NORLYS LONDON 4142

London 4142XX0010
02.11.2026 v.10.6
www.norlys.no

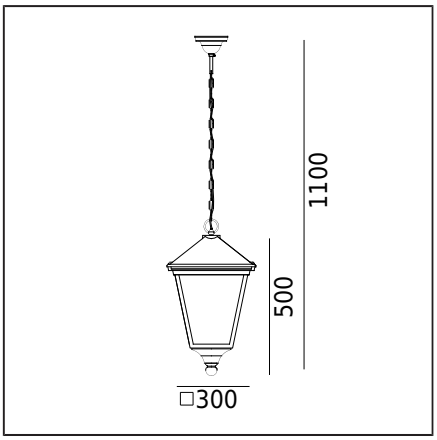

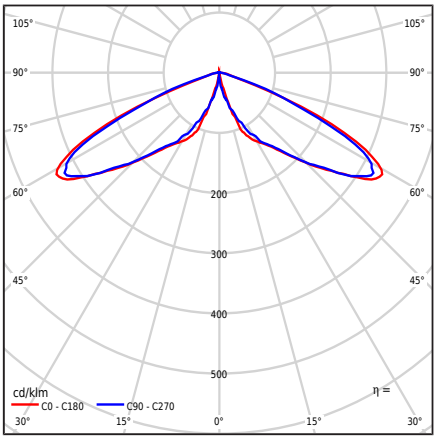

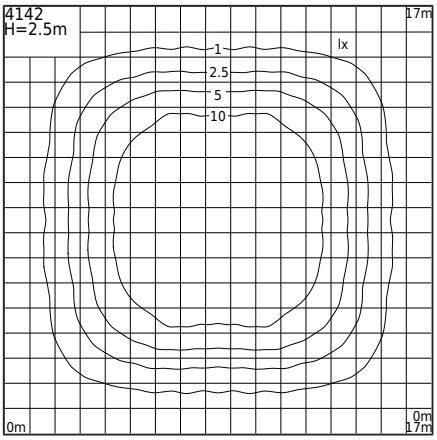

Type of luminaire

Type of luminaire	Pendant light.
Photometric body	Light discovered
Characteristics of the luminaire	Pendant fixture with classic design. For lighting gardens, terraces, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Steel chain powder painted.
Mounting method	Fixture mounting: ceiling hook.
Terminal	Terminal clamps, max 2x2.5mm². Cable in a round sheath with a diameter of ø5...12mm.
Type of light source	LED module, electronic power supply Replaceable light source by a professional. Replaceable control gear by a professional.
Luminaire weight net / gross	3,5kg / 4,32kg
Box dimensions [cm]	44cm x 32,5cm x 54cm
Luminaire dimensions [cm]	110cm x 30cm x 30cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G4+ 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	19,6W
Luminaire wattage	13,5W
Lamp luminous flux	2000lm
Luminaire luminous flux	1795lm
ULOR	0,42%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF>0,9
THD factor	<15%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	5A / 50µs

Maximum number of luminaires of this type per MCB:

B 10A: 31, B 16A: 50, C 10A: 52, C 16A: 85

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
4142BL	BLACK	9005
4142WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE