


NORLYS LONDON 4143

London 4143XX0010
02.11.2026 v.10.2
www.norlys.no

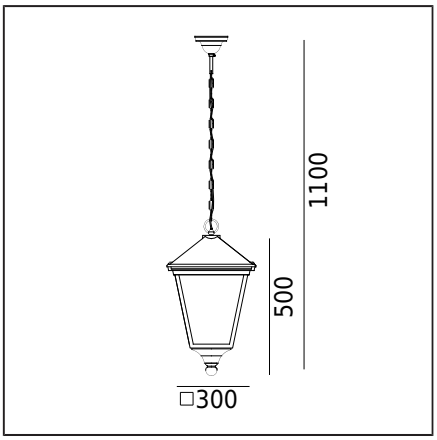

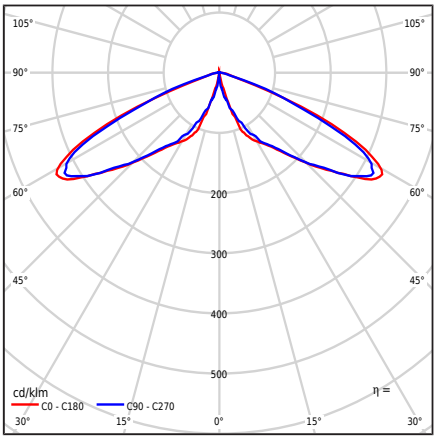

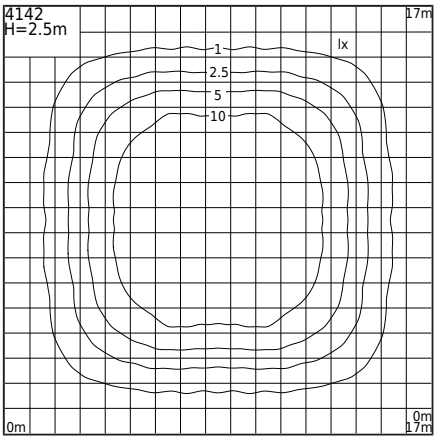

Type of luminaire

Type of luminaire	Pendant light.
Photometric body	Light discovered
Characteristics of the luminaire	Pendant fixture on a chain with classic design. For lighting gardens, terraces, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Steel chain powder painted.
Mounting method	Fixture mounting: ceiling hook.
Terminal	Connection terminals, max 2x2.5mm². Cable with circular sheath, diameter ø5...12mm.
Type of light source	LED module, electronic power supply Replaceable light source by a professional. Replaceable control gear by a professional.
Luminaire weight net / gross	2,35kg / 4,32kg
Box dimensions [cm]	44cm x 32,5cm x 54cm
Luminaire dimensions [cm]	110cm x 30cm x 30cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G4+ 4K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	19,6W
Luminaire wattage	13,5W
Lamp luminous flux	2000lm
Luminaire luminous flux	1942lm
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF>0,9
THD factor	<15%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	5A / 50µs

Maximum number of luminaires of this type per MCB:

B 10A: 31, B 16A: 50, C 10A: 52, C 16A: 85

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
4143BL	BLACK	9005
4143WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE