

# NORLYS ASKER HEAD 4306


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DALI2

ASKER HEAD
4306XX0009
16.09.2026 v.09.6
www.norlys.no

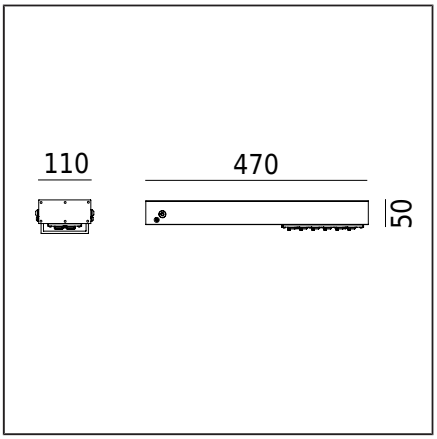

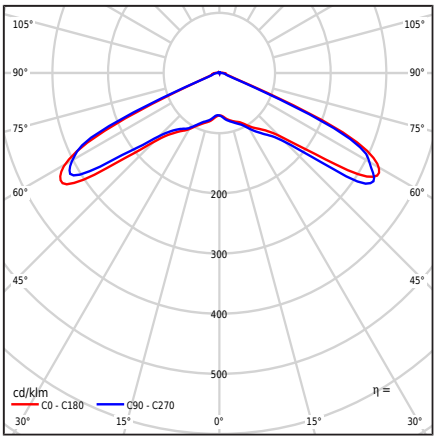


## Type of luminaire
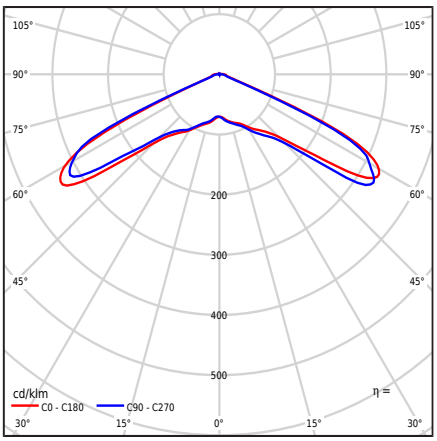
| | |
|---|---|
| Type of luminaire | Pole luminaire. |
| Photometric body | Lens from Ledil type VSM (IESNA type V) |
| Characteristics of the luminaire | Mounted fixture, designed for installation on a lighting pole with a mounting spigot of Ø50mm ; Ø60mm; Ø76mm<br>Wide even light distribution.<br>Fixture also adapted for DC voltage: DC 168 ÷ 275 V |

## General information

| | |
|---|---|
| Materials | Extruded aluminum profile, powder coated. Hermetic external lens - transparent PC plastic. |
| Mounting method | Fixture mounting: the fixture is adapted to pole Ø 50, Ø 60, Ø 76, according to the mounting instructions.<br>Other accessories must be ordered separately |
| Terminal | The luminaire is equipped with a 6m long H05BQ-F 5G1 cable. To be connected<br>to an appropriately selected electrical installation box. |
| Type of light source | Optical kit with IP67 (LED module and lens); electronic power supply<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department. |
| Luminaire weight net / gross | 2,5kg / 2,78kg |
| Box dimensions [cm] | 50,5cm x 12,5cm x 8,5cm |
| Luminaire dimensions [cm] | 47cm x 11cm x 7cm |

## Technical data

| | |
|---|---|
| LED module | Philips Fortimo FastFlex LED 2x6 DP G5 3K (Datasheet) |
| Driver | Yes |
| Driver durability | 100000h |
| External control | DALI2 / NightDim (XI FP NLD) (User manual) |
| Light source wattage | 16,8W |
| Luminaire wattage | 19,6W |
| Lamp luminous flux | 2904lm |
| Luminaire luminous flux | 2711lm |
| Efficiency of the luminaire | 138,3lm/W |
| Color temperature | 3000K |
| Colour consistency (McAdam ellipse) | SDCM5 |
| Colour rendering index CRI | 70 |
| L90B10 [wg LM-80] | >100 000h |
| Power Factor luminaire | PF 0,98 |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |

This product contains light source of energy efficiency class D / EPREL

## Accessories sold separately

| | |
|---|---|
| 7711XX0009 | Mounting adapter |
| 7713XX0009 | Mounting adapter |
| 7712XX0009 | Mounting adapter |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| 4306AL | ALUMINUM | 9006 |
| 4306BL | BLACK | 9005 |
| 4306GR | GRAPHITE | 7016 |

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016 TÜVRheinland CERTIFIED www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE