

NORLYS ASKER HEAD 4346


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DALI2 | DC

ASKER HEAD
4346XX0309
16.09.2026 v.09.5
www.norlys.no



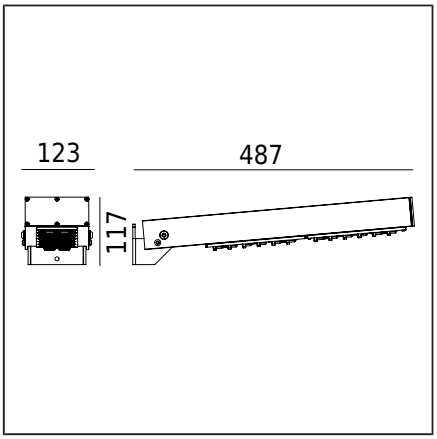

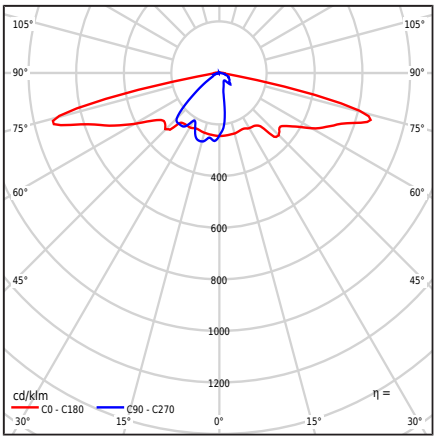

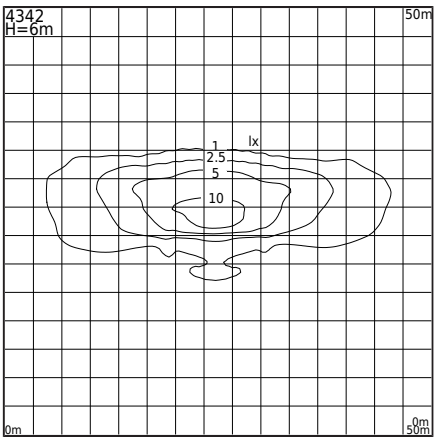

Type of luminaire

Type of luminaire	Wall, arm-mounted luminaire.
Photometric body	Ledil lens type SCL (IESNA type II / III)
Characteristics of the luminaire	Wall fixture with modern design. Intended for wall mounting with an adjustable arm. Wide, even light distribution. Fixture also adapted for direct current: DC 168 ÷ 275 V

General information

Materials	Extruded aluminum profile, powder coated. Hermetic external lens - transparent PC plastic.
Mounting method	Fixture mounting: three Ø 6.5 holes according to the enclosed installation manual. Set contents: art.7713 - wall bracket art.4304 - fixture
Terminal	The fixture is equipped with a ÖLFLEX ROBUST 200 5G1 cable of 0.6m in length, terminating in a hermetic connection.
Type of light source	Optical kit with IP67 (LED module and lens); electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	2,8kg / 3,2kg
Box dimensions [cm]	50,5cm x 12,5cm x 8,5cm
Luminaire dimensions [cm]	48cm x 12cm x 12cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	16,8W
Luminaire wattage	19,5W
Lamp luminous flux	2904lm
Luminaire luminous flux	2624lm
Efficiency of the luminaire	134,6lm/W
ULOR	0.8%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM5
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF 0,98
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
BUG rating	B1-U2-G1

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
4346AL	ALUMINUM	9006
4346BL	BLACK	9005
4346GR	GRAPHITE	7016
4346WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE