

NORLYS ASKER HEAD 4347


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DALI2 | DC

ASKER HEAD
4347XX0309
16.09.2026 v.09.3
www.norlys.no



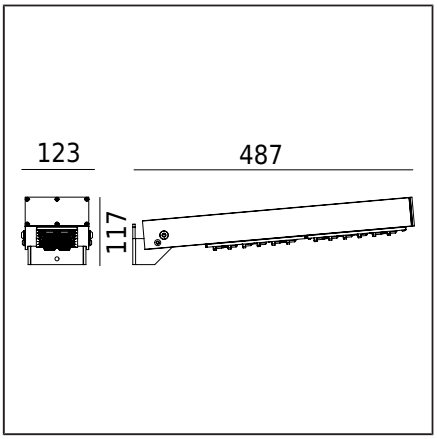

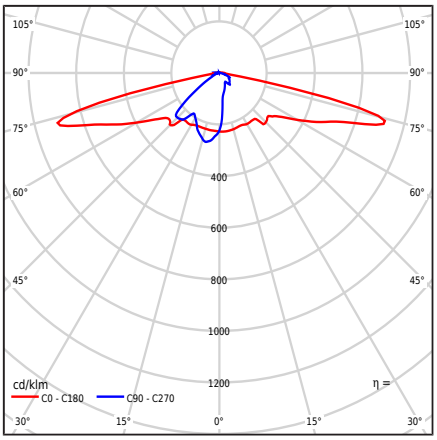

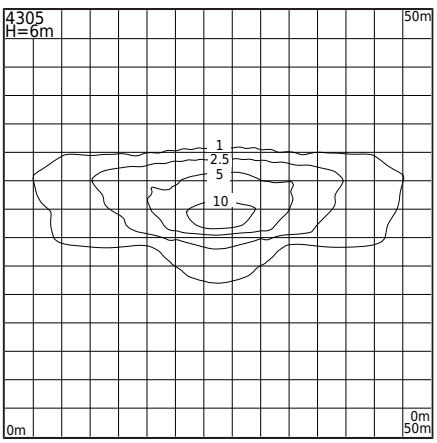

Type of luminaire

Type of luminaire	Wall, arm-mounted luminaire.
Photometric body	Ledil lens type SCL (IESNA type II / III)
Characteristics of the luminaire	Surface-mounted luminaire, designed for installation on a lighting pole with a mounting base Ø50mm; Ø60mm; Ø76mm Wide, evenly distributed light spread. Luminaire also adapted for direct current voltage: DC 168 ÷ 275 V

General information

Materials	Extruded aluminum profile, powder coated. Hermetic external lens - transparent PC plastic.
Mounting method	Fixture mounting: three Ø 6.5 holes according to the attached installation manual. Set composition: art.7713 - wall bracket art.4304 - fitting
Terminal	The fixture is equipped with an ÖLFLEX ROBUST 200 5G1 cable, 0.6m long, ending with a hermetic connector.
Type of light source	Optical kit with IP67 (LED module and lens); electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	2,5kg / 2,78kg
Box dimensions [cm]	50,5cm x 12,5cm x 8,5cm
Luminaire dimensions [cm]	48cm x 12cm x 12cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 4K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	16,8W
Luminaire wattage	19,5W
Lamp luminous flux	3036lm
Luminaire luminous flux	2742lm
Efficiency of the luminaire	140,6lm/W
ULOR	0,8%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM4
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF 0,98
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
BUG rating	B1-U2-G1

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
4347AL	ALUMINUM	9006
4347BL	BLACK	9005
4347GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning assembly, familiarize yourself with the instructions included with the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. The LED module is replaceable by a person with the appropriate qualifications, in accordance with applicable regulations. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.