

# NORLYS ASKER HEAD 4348


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DALI2 | DC

ASKER HEAD
4348XX0309
16.09.2026 v.09.3
www.norlys.no

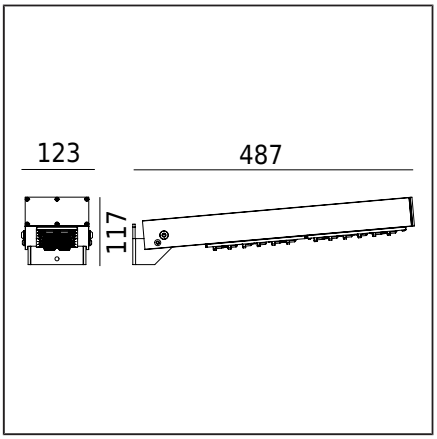

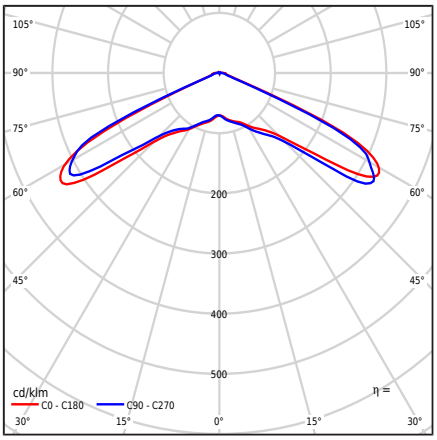


## Type of luminaire
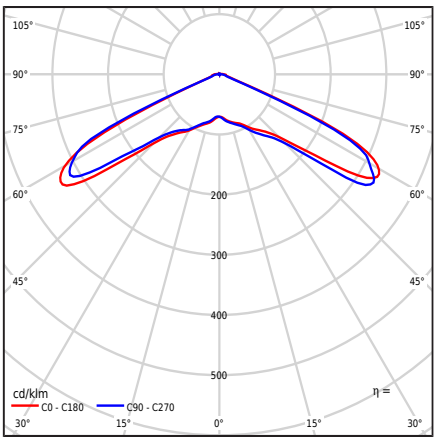
| | |
|---|---|
| Type of luminaire | Wall, arm-mounted luminaire. |
| Photometric body | Lens from Ledil type VSM (IESNA type V) |
| Characteristics of the luminaire | Wall fixture with modern design. Designed for wall mounting with an adjustable arm. Wide, even light distribution.<br>Fixture also adapted for direct current voltage: DC 168 ÷ 275 V. |

## General information

| | |
|---|---|
| Materials | Extruded aluminum profile, powder coated. Hermetic external lens - transparent PC plastic. |
| Mounting method | Fixture mounting: three holes Ø 6.5 as per the attached installation manual.<br>Set includes:<br>art.7713 - wall bracket<br>art.4304 - fixture |
| Terminal | The luminaire is equipped with an ÖLFLEX ROBUST 200 5G1 cable, 0.6m long, finished with a hermetic connector. |
| Type of light source | Optical kit with IP67 (LED module and lens); electronic power supply<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department. |
| Luminaire weight net / gross | 2,5kg / 2,78kg |
| Box dimensions [cm] | 50,5cm x 12,5cm x 8,5cm |
| Luminaire dimensions [cm] | 48cm x 12cm x 12cm |

## Technical data

| | |
|---|---|
| LED module | Philips Fortimo FastFlex LED 2x6 DP G5 3K (Datasheet) |
| Driver | Yes |
| Driver durability | 100000h |
| External control | DALI2 / NightDim (XI FP NLD) (User manual) |
| Light source wattage | 16,8W |
| Luminaire wattage | 19,6W |
| Lamp luminous flux | 2904lm |
| Luminaire luminous flux | 2711lm |
| Efficiency of the luminaire | 138,3lm/W |
| Color temperature | 3000K |
| Colour consistency (McAdam ellipse) | SDCM5 |
| Colour rendering index CRI | 70 |
| L90B10 [wg LM-80] | >100 000h |
| Power Factor luminaire | PF 0,98 |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |

This product contains light source of energy efficiency class D / EPREL

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| 4348AL | ALUMINUM | 9006 |
| 4348BL | BLACK | 9005 |
| 4348GR | GRAPHITE | 7016 |

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting assembly, it is necessary to familiarize oneself with the instructions attached to the fixture. Installation and service work is carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. The LED module is replaceable by a person with appropriate qualifications, in accordance with applicable regulations. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.