

NORLYS ASKER HEAD 4352


IP 65 | IK 10 | AC 220-240V 50-60Hz | LED | DALI2

ASKER HEAD
4352XX0309
16.09.2026 v.09.9
www.norlys.no



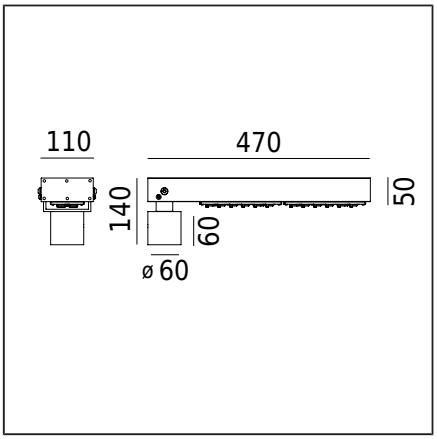

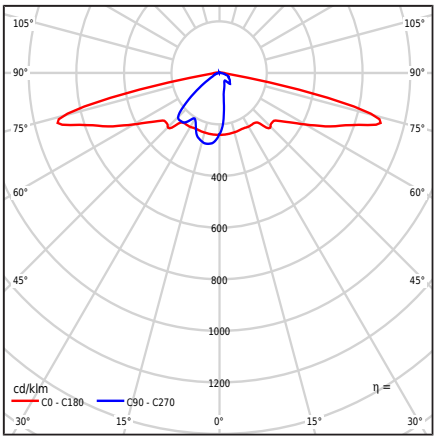

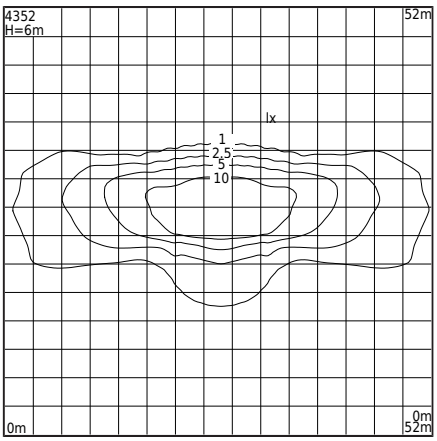

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Ledil lens type SCL (IESNA type II / III)
Characteristics of the luminaire	Fixture on a straight arm for mounting on a light pole with a mounting spigot Ø60mm. Wide, even light distribution. Fixture also adapted for direct current: DC 168 ÷ 275 V.

General information

Materials	Extruded aluminum profile, powder coated. Lens - clear polycarbonate, UV stabilized.
Mounting method	Fixture mounting: fixture adapted to pole Ø 60 according to the installation instructions. Set composition: art.7711 - handle Ø60 art.4314 - fixture
Terminal	The fixture is equipped with a 6m long H05BQ-F 5G1 type cable. For connection in a suitably chosen electrical installation box.
Type of light source	Optical kit with IP67 (LED module and lens); electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	2,8kg / 3,2kg
Box dimensions [cm]	50,5cm x 12,5cm x 8,5cm
Luminaire dimensions [cm]	47cm x 11cm x 7cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	35,6W
Luminaire wattage	39,8W
Lamp luminous flux	6051lm
Luminaire luminous flux	5457lm
Efficiency of the luminaire	137,1lm/W
ULOR	0,8%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM5
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF 0,97
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
BUG rating	B2-U2-G2

Accessories sold separately

7711XX0009	Mounting adapter
7712XX0009	Mounting adapter

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please refer to the instructions included with the fixture. Installation and service work should be conducted by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer request. The LED module is replaceable by a person with appropriate qualifications, in accordance with applicable regulations. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the quality of the fixture.

ASKER HEAD 4352

Indexes

Index	Color	RAL
4352AL	ALUMINUM	9006
4352BL	BLACK	9005
4352GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Before starting the installation, please refer to the instructions included with the fixture. Installation and service work should be conducted by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer request. The LED module is replaceable by a person with appropriate qualifications, in accordance with applicable regulations. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the quality of the fixture.