

NORLYS ASKER HEAD 4358


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DALI2 | DC

ASKER HEAD
4358XX0309
16.09.2026 v.09.4
www.norlys.no



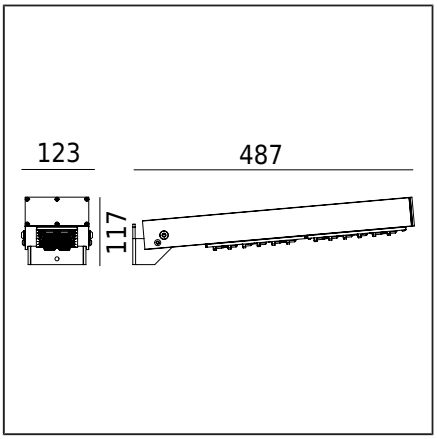

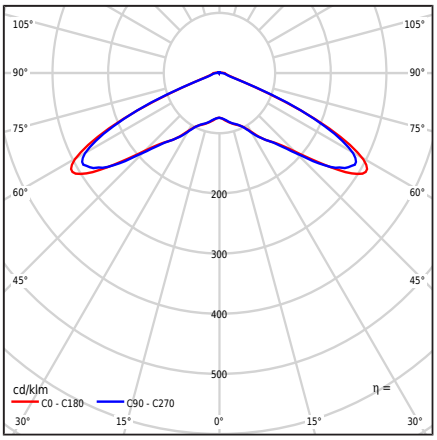

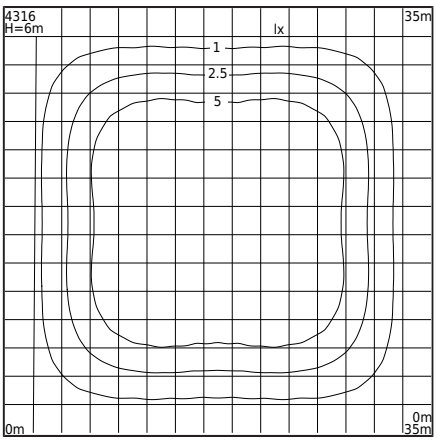

Type of luminaire

Type of luminaire	Wall, arm-mounted luminaire.
Photometric body	Lens from Ledil type VSM (IESNA type V)
Characteristics of the luminaire	A wall fixture with a modern design. Designed to be mounted on the wall using an adjustable arm. Wide and even light distribution. Fixture also adapted for direct current: DC 168 ÷ 275 V

General information

Materials	Extruded aluminum profile, powder coated. Hermetic external lens - transparent PC plastic.
Mounting method	Fixture mounting: three holes Ø 6.5 according to the attached installation instructions. Set composition: art.7713 - wall bracket art.4316 - fixture
Terminal	The fixture is equipped with a 0.6m long ÖLFLEX ROBUST 200 5G1 cable, ending with a hermetic connector.
Type of light source	Optical kit with IP67 (LED module and lens); electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	2,5kg / 2,78kg
Box dimensions [cm]	50,5cm x 12,5cm x 8,5cm
Luminaire dimensions [cm]	48cm x 12cm x 12cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	35,6W
Luminaire wattage	39,8W
Lamp luminous flux	6051lm
Luminaire luminous flux	5732lm
Efficiency of the luminaire	144lm/W
ULOR	0,8%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM5
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF 0,97
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
BUG rating	"B3-U2-G1"

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
4358AL	ALUMINUM	9006
4358BL	BLACK	9005
4358GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, familiarize yourself with the instructions included with the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. The LED module is replaceable by a person with appropriate qualifications, in accordance with applicable regulations. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.