

NORLYS ASKER HEAD 4393


IP 65 | IK 10 | LED | DALI2

ASKER HEAD
4393XX0309
16.09.2026 v.09.9
www.norlys.no



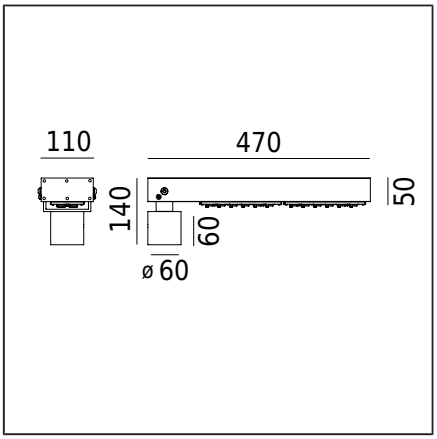

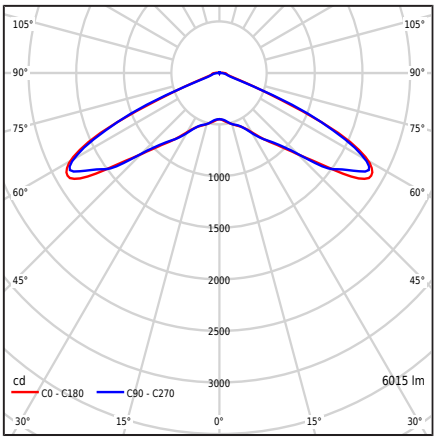

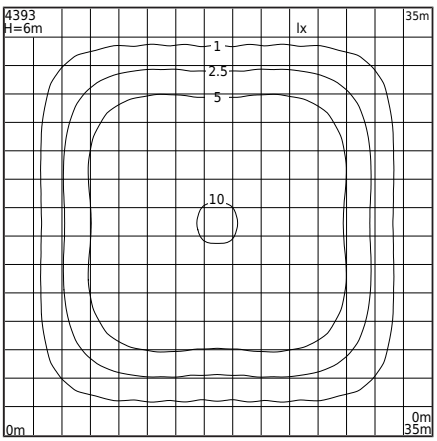

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Lens from Ledil type VSM (IESNA type V)
Characteristics of the luminaire	Surface-mounted luminaire, designed to be installed on a lighting pole with a mounting shaft Ø60mm. Wide, even light distribution. The luminaire is also adapted for direct current: DC 168 ÷ 275 V

General information

Materials	Extruded aluminum profile, powder coated. Hermetic external lens - transparent PC plastic.
Mounting method	Fixture mounting: fixture adapted to Ø 60 pole according to the installation instructions. Set composition: art.7711 - holder Ø60 art.4317 - fixture
Terminal	The fixture is equipped with a 6-meter long H05BQ-F 5G1 type cable. For connection in a properly selected electrical junction box.
Type of light source	Optical kit with IP67 (LED module and lens); electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	2,8kg / 3,2kg
Box dimensions [cm]	50,5cm x 12,5cm x 8,5cm
Luminaire dimensions [cm]	47cm x 11cm x 7cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 4K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	35,6W
Luminaire wattage	39,8W
Lamp luminous flux	6342lm
Luminaire luminous flux	6015lm
Efficiency of the luminaire	151,1lm/W
ULOR	0,8%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM4
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF 0,97
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
BUG rating	"B3-U2-G1"

Accessories sold separately

7711XX0009	Mounting adapter
7712XX0009	Mounting adapter

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the manual attached to the fixture.
Due to the dynamic development of lighting technology, additional information is provided upon customer request.
The LED module can be replaced by a qualified person in accordance with applicable regulations.
Condensation that may occur in the fixtures is a natural phenomenon and does not affect the deterioration of the fixture quality.

ASKER HEAD 4393



Indexes

Index	Color	RAL
4393AL	ALUMINUM	9006
4393BL	BLACK	9005
4393GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System
ISO 9001:2015
IATF 16949:2016
www.tuv.com
ID 9108651873

PCC Cert
CERTIFICATE
ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the manual attached to the fixture.
Due to the dynamic development of lighting technology, additional information is provided upon customer request.
The LED module can be replaced by a qualified person in accordance with applicable regulations.
Condensation that may occur in the fixtures is a natural phenomenon and does not affect the deterioration of the fixture quality.