
NORLYS LONDON 482

AC 220-240V 50-60Hz | IP 54 | IK 07 | E27

London 482XX0309
16.09.2026 v.09.6
www.norlys.no



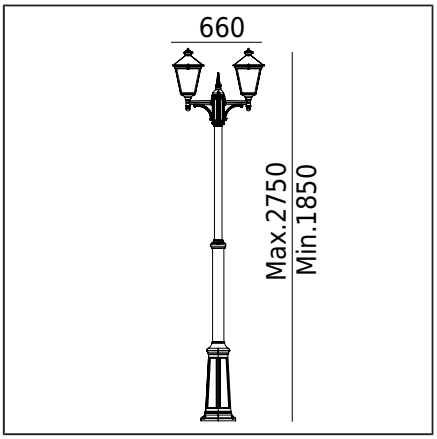

Type of luminaire

Photometric body	Light discovered
Characteristics of the luminaire	Classic design luminaire, mounted on a telescopic lighting pole. Adjustable height 1850..2750mm. For lighting gardens, terraces and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - clear polycarbonate, UV stabilized.
Mounting method	Fixing of the luminaire: 3 holes ø10,5mm, on a daimeter ø240mm every 120°. Set contains: Art. 4020 - luminaire, Art. 3040 - reduction, Art. 3010 - lightning pole. Other accessories need to be purchased separately.
Terminal	Connection terminal: max. 4x2,5mm² cable, possibility to connect luminaire in loop max 4x2,5mm². A round wire in the isolation with a diameter of max ø7...10,5mm.
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	10,79kg / 13,59kg

Technical data

Lamp E27	LED A55..60
Light source wattage	LED 2 x MAX 9W
Luminaire wattage	LED 2 x MAX 9W
Ambient operating temp. range	-20...+45°C

Accessories sold separately

7668ZX0009	Concrete foundation
30101XX0011	Telescopic pole
3010XX0011	Telescopic pole
305ZX0009	Concreting anchor
306ZX0009	Ground anchor
108GA0309	Adapter for concrete foundation
6010GA0010	Mounting adapter

Spare parts

0904800051	Lampshade - service kit

Files to download

Manual

Indexes

Index	Color	RAL
482BL	BLACK	9005
482WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.