
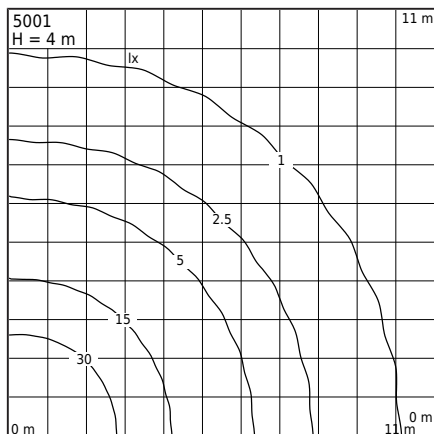
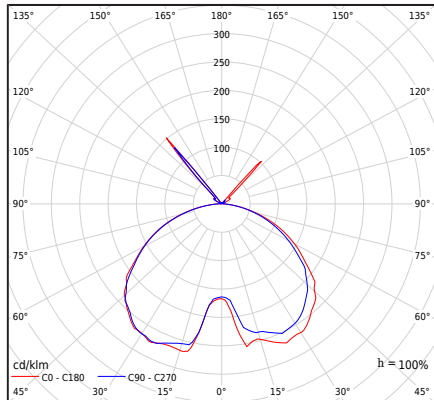


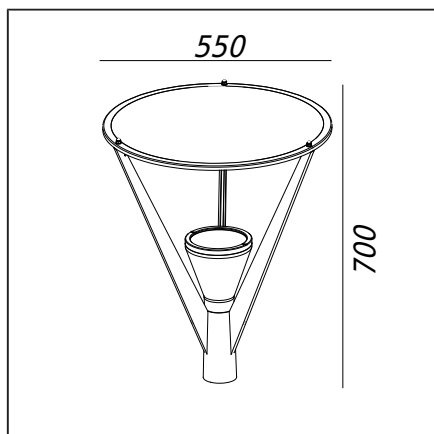

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Indirect symmetrical light.
Characteristics of the luminaire	Surface-mounted luminaire designed to be installed on a lighting pole with a mounting post of Ø60mm.

General information

Materials	Powder painted aluminum cast. Lens - safety glass, transparent. Silicone gasket.
Mounting method	Fixing of the luminaire: luminaire adjusted to Ø60mm lighting pole.
Terminal	4.5 m of H05VV-F 3G1 cable, for connection inside the lighting pole (in an appropriately selected electrical installation box).
Type of light source	LED module, electronic power supply
Light control	Non-dimmable fixture
Net / gross weight of luminaire	9,18kg / 11,75kg
Box dimensions [cm]	80cm x 62cm x 62cm
Side area of luminaire	0,1m ²

Technical data

Luminaire wattage	38,8W
Luminaire luminous flux	3260lm
Efficiency of the luminaire	84lm/W
ULOR	6,84%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>50 000h
Power Factor luminaire	PF 0,97
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

Optional version, deadline, and terms of implementation after consultation with the Sales Department of Norlys Sp. z o.o.

Inrush current	22A/260µs
BUG rating	B1-U3-G1

Maximum number of luminaires of this type per MCB:

B 10A: 15, B 16A: 24, C 10A: 24, C 16A: 40

Spare parts

06770000	Lampshade.
08770001	Gasket.
46999728	Power supply.
46999737	LED module.

Files to download

Photometric LDT files	Photometric IES files
3D models and drawings	Manual

Indexes

Index	Color	RAL
5001AL	ALUMINUM	9006
5001GR	GRAPHITE	7016