

NORLYS VISBY 5002


AC 220-240V 50-60Hz | IP 65 | LED

Visby 5002XX0309
06.11.2026 v.09.6
www.norlys.no



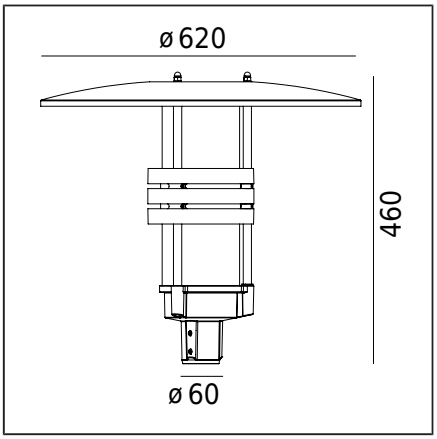

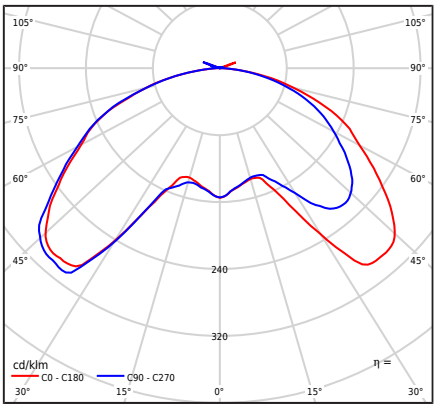

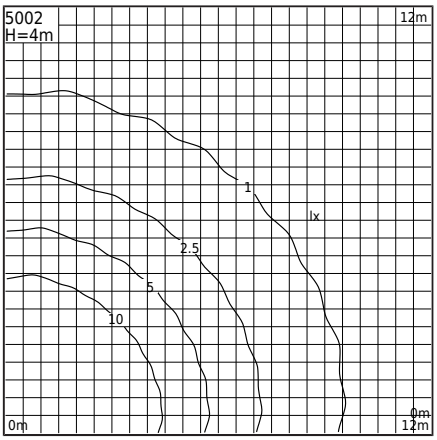

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Light with rotationally symmetrical light distribution (direct/indirect light).
Characteristics of the luminaire	Surface-mounted luminaire designed to be installed on a lighting pole with a mounting post of Ø60mm.

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket.
Mounting method	Luminaire mounting: fixture suitable for Ø60mm pole. Set composition: 6017 - fixture 6013 - canopy
Terminal	H05VV-F 3G1 cable with a length of 4.5m for connection inside a lighting pole (in a suitably selected electrical junction box). Possibility to control LED modules (on/off): illumination of both upper and lower modules or only the upper module (indirect light, 3000lm/27W), or only the lower module (direct light, 2000lm/17.5W).
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Non-dimmable fixture
Luminaire weight net / gross	7,35kg / 8,99kg
Side area of luminaire	0,086m^2

Technical data

2 LED modules	Philips LED Fortimo DLM ES 2000/840 G2 / 3000/840 G2
Light source wattage	44,5W
Luminaire wattage	43,6W
Lamp luminous flux	5200lm
Luminaire luminous flux	2624lm
ULOR	1,64%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
Optional version, deadline, and terms of execution to be agreed with the Sales Department of Norlys Sp. z o.o.	
Inrush current	2,63A / 47,27µs
BUG rating	"B1-U2-G1"

Accessories sold separately

3070XX0009	Reduction
154XX0010	Mounting adapter
7660XX0009	Reduction

Spare parts

0950020200	Electrical service kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
5002AL	ALUMINUM	9006
5002GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.