

NORLYS KOSTER 5006


AC 220-240V 50-60Hz | IP 54 | IK 10 | LED

Koster 5006XX0011
16.09.2026 v.11.7
www.norlys.no



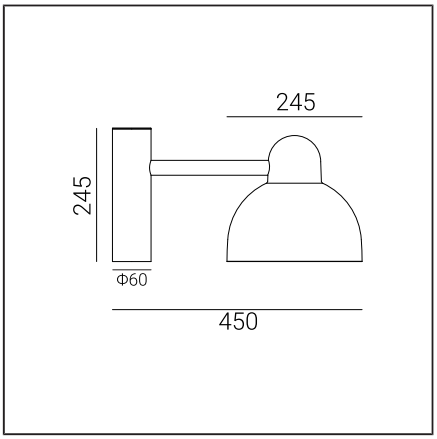

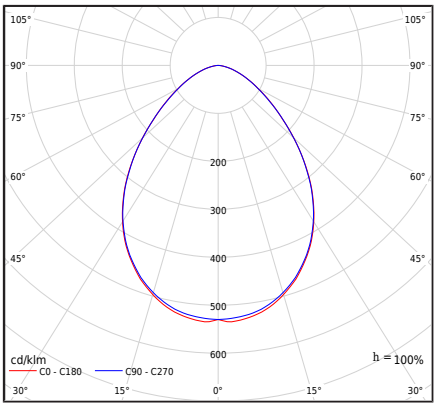

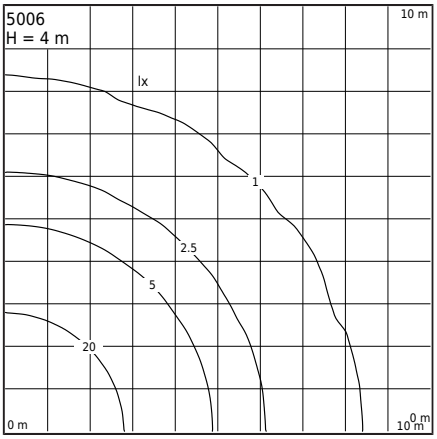

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Single-sided light: symmetrical, directed downward.
Characteristics of the luminaire	Luminaire mounted on a straight arm, for assembly on a telescopic lighting pole with a diameter of Ø60mm.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized.
Mounting method	Mounting of the luminaire: adapted to a ø60mm pole with a depth 80mm. According to the attached assembly instructions. Other accessories must be purchased separately
Terminal	H05VV-F 3G1 cable, 3.7m long, for connection in a properly selected electrical installation box
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Non-dimmable fixture
Luminaire weight net / gross	3,25kg / 3,92kg
Box dimensions [cm]	46cm x 25,5cm x 25,5cm
Luminaire dimensions [cm]	45cm x 24,5cm x 24,5cm
Side area of luminaire	0,045m^2

Technical data

LED module	Philips Fortimo DLM ES 2000/8xx G2 4K (Datasheet)
Light source wattage	17,5W
Luminaire wattage	17,5W
Lamp luminous flux	2050lm
Luminaire luminous flux	1625lm
Efficiency of the luminaire	92,9lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	3,01A/32,66µs
BUG rating	B1-U1-G0

Spare parts

06710000	Lampshade - service kit
46999752	LED module.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5006AL	ALUMINUM	9006
5006GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, following applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.