



NORLYS ASKER BIG 5018

Asker big
5018XX0013
16.09.2026 v.13.14
www.norlys.no

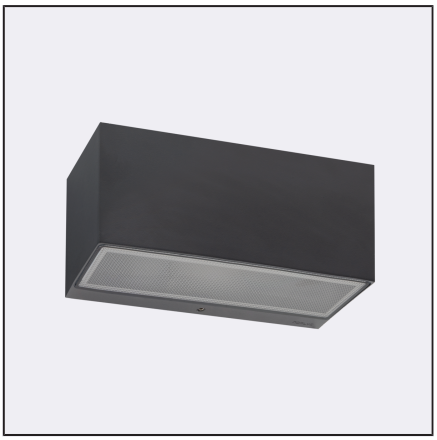

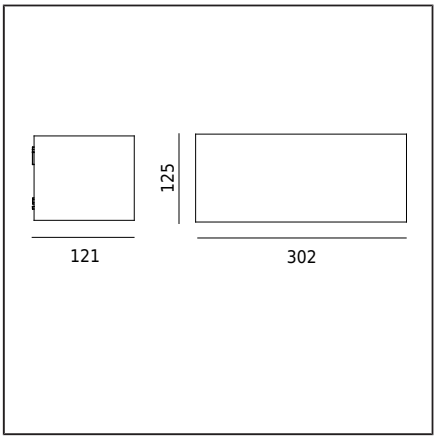

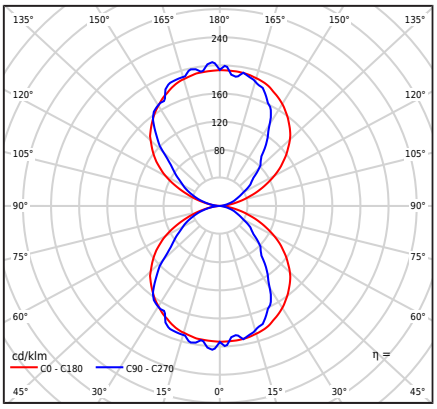

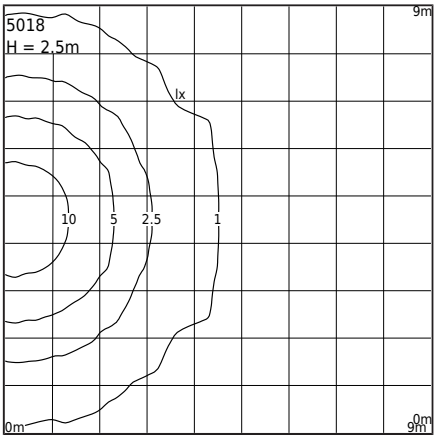

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	Fixture with a wide range of applications, for illuminating wall surfaces and facades as well as other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: intermediate plate with 2 adjustable holes 5x10mm, spacing 45mm, directly 2 holes ø5mm, spacing 68mm.
Terminal	Connection terminals: max 3x2.5mm², possibility to loop the fixture max 3x1.5mm². Cable in a round sheath with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	2,62kg / 2,98kg
Box dimensions [cm]	34,5cm x 15cm x 17cm
Luminaire dimensions [cm]	30,2cm x 12,1cm x 12,5cm

Technical data

2 LED modules	Philips Fortimo Strip 0,5ft MF FC LV6 4K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	6,6W
Luminaire wattage	8,5W
Lamp luminous flux	1188lm
Luminaire luminous flux	550lm
Efficiency of the luminaire	64,7lm/W
ULOR	50%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤0.3
Strobe effect (SVM)	≤0.7
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
Power Factor luminaire	PF 0,90
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light sources of energy efficiency class C / EPREL	
Inrush current	1,65A/16,5µs]
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 157

Spare parts

ZS5018zx0013	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before beginning assembly, please familiarize yourself with the instructions provided with the fixture. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.

ASKER BIG 5018

Indexes

Index	Color	RAL
5018AL	ALUMINUM	9006
5018BL	BLACK	9005
5018GR	GRAPHITE	7016
5018WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Before beginning assembly, please familiarize yourself with the instructions provided with the fixture. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.