

NORLYS GRIMSTAD 5025


AC 220-240V 50-60Hz | IP 65 | IK 09 | LED | DIM

Grimstad
5025XX0011
16.09.2026 v.11.2
www.norlys.no



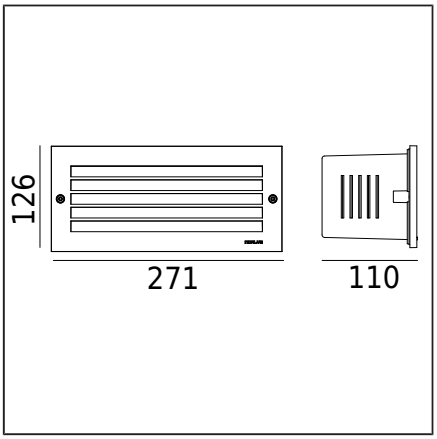

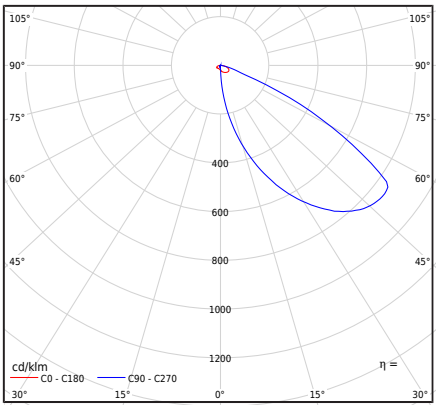

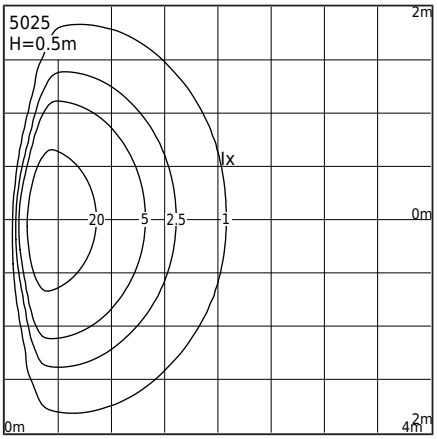

Type of luminaire

Type of luminaire	Recessed wall luminaire.
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	The fixture is designed for stair lighting, steps, stairwells, corridors, and other applications.

General information

Materials	Powder painted aluminum cast. Lens - safety glass, milky colour. Silicone gasket. EPDM cable gland.
Mounting method	Fitting fixture: embedded in the wall - opening 258x112x115, fitting in a layered wall - opening 235x96x82
Terminal	Connection terminals: max 3x2.5mm², possibility of connecting the fixture in a loop max 3x1.5mm². Round cable with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	1,63kg / 1,78kg
Box dimensions [cm]	28cm x 13,5cm x 11,5cm
Luminaire dimensions [cm]	27cm x 12,5cm x 11cm

Technical data

LED module	Philips FORTIMO DLM FLEX 1100/840 G2
Driver	Yes
Luminaire wattage	7,4W
Luminaire luminous flux	72lm
Efficiency of the luminaire	9,7lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80B20 [wg LM-80]	46 000h
Power Factor luminaire	PF>0,90
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class	D
Optional version, deadline, and terms of execution to be agreed with the Norlys Sales Department Sp. S.A.	
Inrush current	1,65A/16,5µs

Maximum number of luminaires of this type per MCB:

B 10A: 160, B 16A: 254, C 10A: 264, C 16A: 431

Spare parts

06152000	Lampshade - service kit
08154000	Gasket.
46999607	LED module.
46999610	Power supply.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
5025AL	ALUMINUM	9006
5025GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, read the instructions included with the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the quality of the fixture.