
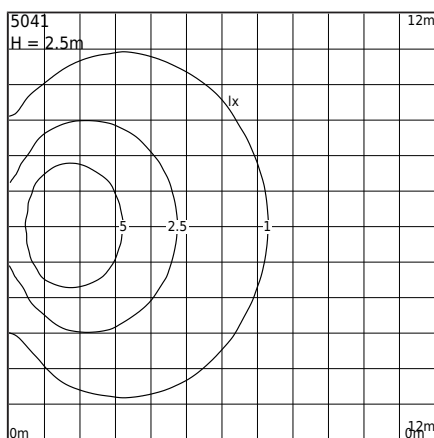
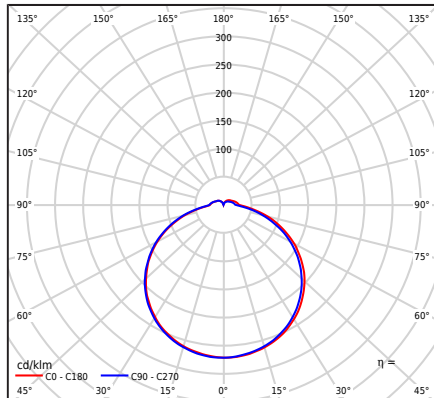


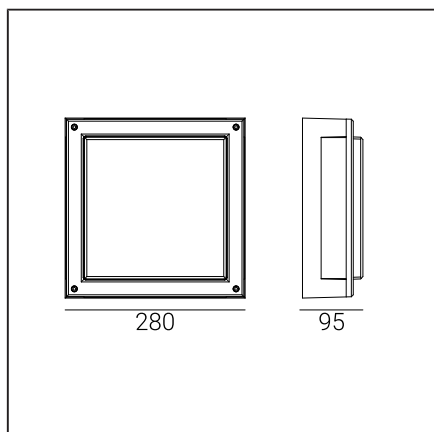

Type of luminaire

Type of luminaire	Wall/ceiling luminaire.
Photometric body	Diffused light.
Characteristics of the luminaire	Plafon type luminaire with a modern design. For lighting private areas and other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - milky polycarbonate, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: 2 holes $\varnothing 5\text{mm}$, spacing 150x170mm
Terminal	Connection terminals: max 3x2.5mm ² , Possibility to connect the luminaire in loops, max 3x1.5mm ² . Round insulated cable with a diameter of $\varnothing 7 \dots 10.5\text{mm}$
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Non-dimmable fixture
Net / gross weight of luminaire	2,47kg / 2,82kg
Box dimensions [cm]	30,5cm x 30,5cm x 11cm

Technical data

Luminaire wattage	17,5W
Luminaire luminous flux	716lm
Efficiency of the luminaire	40,9lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	50 000h
THD factor	30 %
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

This product contains light source of energy efficiency class **E** / **EPREL**

Inrush current	3,01A/32,66μs
----------------	---------------

Spare parts

06720002	Lampshade.
ZS5041zx0011	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5041AL	ALUMINUM	9006
5041GR	GRAPHITE	7016
5041WH	WHITE	9003