
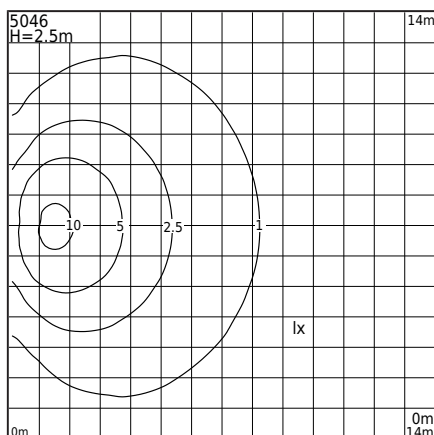
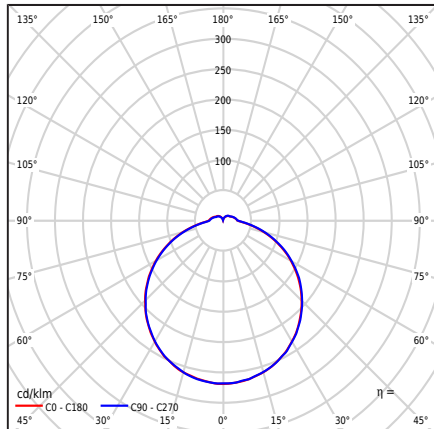


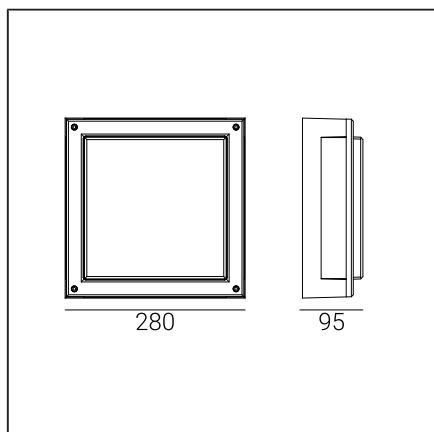

Type of luminaire

Type of luminaire	Wall/ceiling luminaire.
Photometric body	Diffused light.
Characteristics of the luminaire	A ceiling-type luminaire with a modern design For lighting private areas and other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - milky polycarbonate, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: 2 holes $\varnothing 5\text{mm}$, spacing 150x170mm
Terminal	Connection terminals: max 3x2,5mm ² Possibility to connect the luminaire in loops, max 3x1,5mm ² Round insulated cable with a diameter of $\varnothing 7\text{...}10,5\text{mm}$
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Net / gross weight of luminaire	2,25kg / 2,55kg
Box dimensions [cm]	30,5cm x 30,5cm x 11cm
Luminaire dimensions [cm]	280cm x 280cm x 95cm

Technical data

External control	Phase dimmer Lumens LED AC (User manual)
Luminaire wattage	16W
Luminaire luminous flux	934lm
Efficiency of the luminaire	58,4lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	50 000h
Power Factor luminaire	PF 0,95
THD factor	25%
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

This product contains light source of energy efficiency class **F** / **EPREL**

Optionally, the luminaire is also available:

- For the LED color 2700K [I/I]

- For a different color of the fitting (according to the RAL color palette)

Terms of sale and other information, after contact with the Sales Department of Norlys

Inrush current	50mA / 60ms
BUG rating	"B0-U3-G1"

Spare parts

ZS5046zx0009	Service set.
--------------	--------------

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5046AL	ALUMINUM	9006
5046GR	GRAPHITE	7016
5046WH	WHITE	9003