
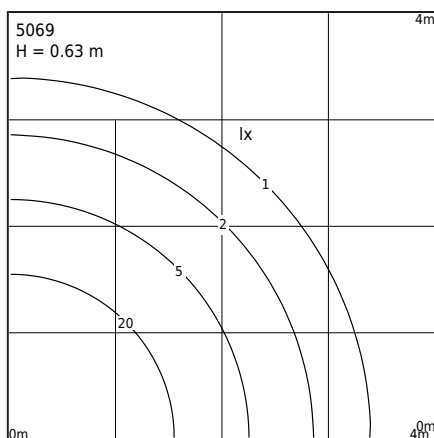
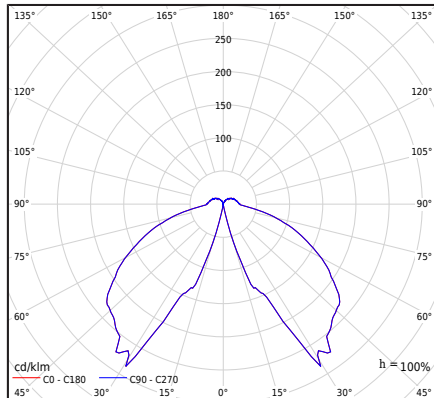


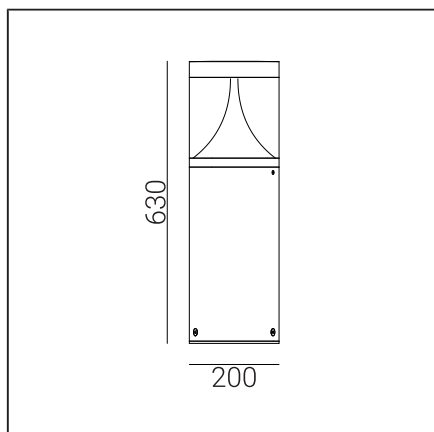

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light with rotationally symmetrical light distribution.

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket. Nylon6 cable gland.
Mounting method	Mounting of the fixture: 3 holes ø9mm on a diameter of ø65mm every 120°.
Terminal	Connection terminals: max 5x4mm ² , possibility of looping the fixture max 5x4mm ² . Round cable with a diameter of ø8...17mm.
Type of light source	LED module, DALI outdoor electronic power supply
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Net / gross weight of luminaire	7,85kg / 9,15kg
Box dimensions [cm]	22cm x 23cm x 68cm
Luminaire dimensions [cm]	20cm x 20cm x 63cm

Technical data

Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Luminaire wattage	23W
Luminaire luminous flux	1586lm
Efficiency of the luminaire	69lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>50 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,98
THD factor	7%
Overvoltage	6 / 10kV
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

This product contains light sources of energy efficiency class **A** / **E** EPREL

Inrush current	15A / 360µs
BUG rating	B1-U3-G1

Accessories sold separately

3087GA0009	Mounting adapter
------------	------------------

Spare parts

09128010	Lampshade.
ZS5069zx0009	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
5069AL	ALUMINUM	9006
5069GR	GRAPHITE	7016