

NORLYS KOSTER 5070


IP 54 | IK 10 | AC 220-240V 50-60Hz | LED

Koster 5070XX0011
16.09.2026 v.11.6
www.norlys.no



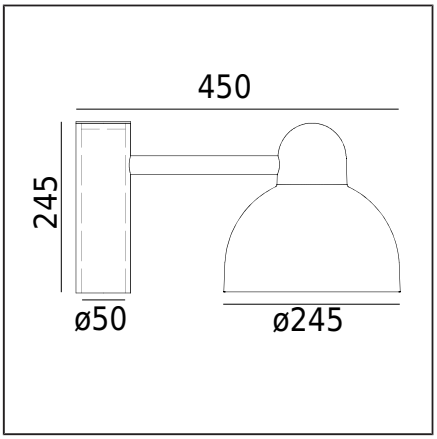

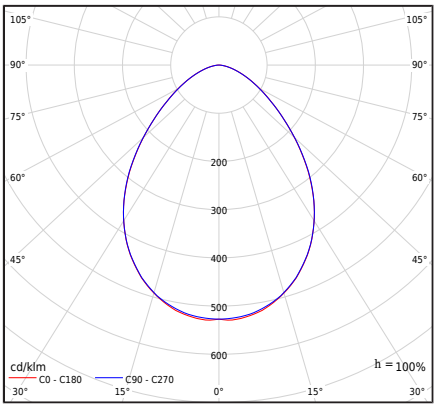

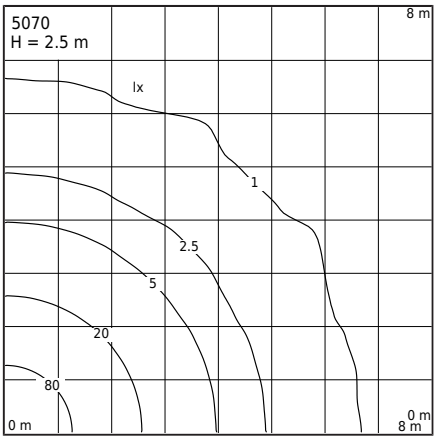

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Single-sided light: symmetrical, directed downward.
Characteristics of the luminaire	Classic design luminaire for mounting on a telescopic lighting pole with cap diameter Ø50mm.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized.
Mounting method	Fixing of the luminaire: luminaire adjusted to ø50mm lighting pole.
Terminal	3.7m cable (H05VV-F 3G1 type), for connection inside the lighting pole (in the appropriately selected electrical installation box).
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Non-dimmable fixture
Luminaire weight net / gross	3,07kg / 3,67kg
Box dimensions [cm]	43,5cm x 29cm x 24cm
Side area of luminaire	0,01m^2

Technical data

LED module	Philips LED Fortimo DLM ES 2000/840 G2
Light source wattage	17,5W
Luminaire wattage	17,5W
Lamp luminous flux	2050lm
Luminaire luminous flux	1625lm
Efficiency of the luminaire	92,9lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D	
Optional version, deadline, and terms of execution upon agreement with the Sales Department of Norlys Ltd.	
Inrush current	3,01A/32,66µs
BUG rating	B1-U1-G0

Spare parts

06710000	Lampshade - service kit
46999752	LED module.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5070AL	ALUMINUM	9006
5070GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.