
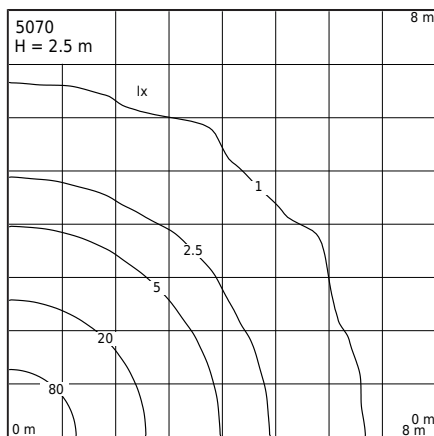
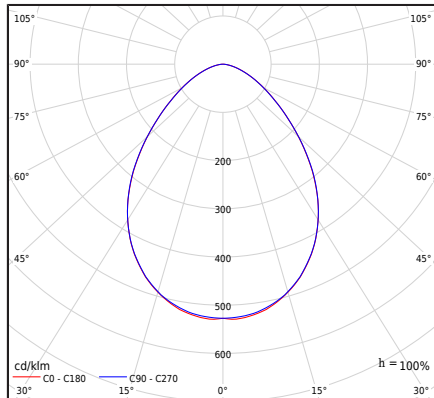


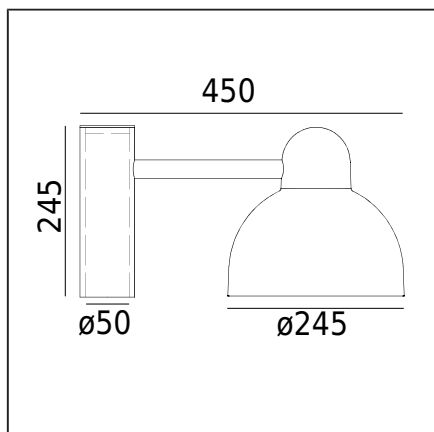

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Single-sided, symmetric light facing down.
Characteristics of the luminaire	Classic design luminaire for mounting on a telescopic lighting pole with cap diameter Ø50mm.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized.
Mounting method	Fixing of the luminaire: luminaire adjusted to Ø50mm lighting pole.
Terminal	3.7m cable (H05VV-F 3G1 type), for connection inside the lighting pole (in the appropriately selected electrical installation box).
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Non-dimmable fixture
Net / gross weight of luminaire	3,07kg / 3,67kg
Box dimensions [cm]	43,5cm x 29cm x 24cm
Side area of luminaire	0,01m ²

Technical data

Luminaire wattage	17,5W
Luminaire luminous flux	1625lm
Efficiency of the luminaire	92,9lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	50 000h
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

This product contains light source of energy efficiency class **A**

Optional version, deadline, and terms of execution upon agreement with the Sales Department of Norlys Ltd.

Inrush current	3,01A/32,66µs
BUG rating	B1-U1-G0

Spare parts

06710000	Lampshade.
46999752	LED module.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5070AL	ALUMINUM	9006
5070GR	GRAPHITE	7016