
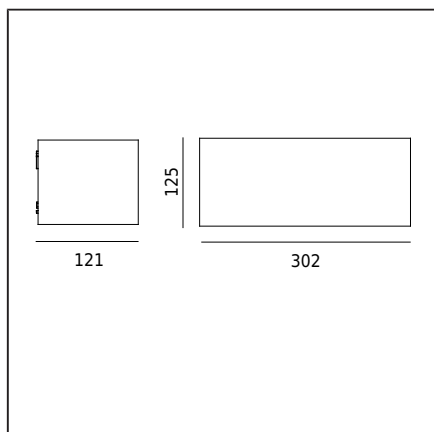


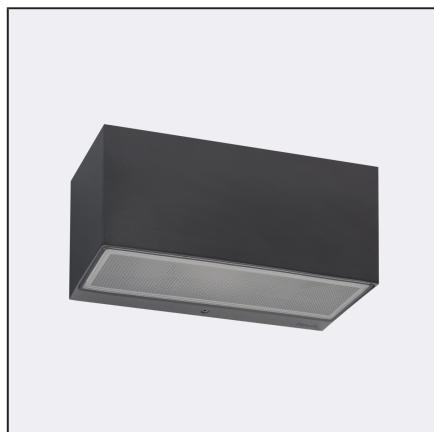

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Luminaire with a wide range of applications for example for illumination of walls and facade surfaces or any other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixing of the luminaire: mounting plate with 2 adjust holes 5x10mm, spacing 45mm, directly 2 holes ø5mm, spacing 68mm.
Terminal	Connection terminals: max 3x2,5mm ² , possibility to connect luminaire in loop max 3x1,5mm ² . A round wire in the isolation with a diameter of ø7...10,5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control - DALI/TD system

Technical data

Luminaire wattage	10,2W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>70 000h
Power Factor luminaire	PF 0,82
Ta Rated temperature	+25°C, up to +50°C on request
Ambient temperature	Ta max=+65°C

Optional version, deadline and terms of delivery after consultation with the Sales Department Norlys Sp. z o.o.

Inrush current	5A/45µs
----------------	---------

Spare parts

08120006	Gasket.
46999609	LED module.
46999733	Power supply.

Files to download

Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5085AL	ALUMINUM	9006
5085BL	BLACK	9005
5085GR	GRAPHITE	7016