


NORLYS ASKER BIG PRO 5086


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI2

Asker big pro
5086XX0010
16.09.2026 v.10.10
www.norlys.no

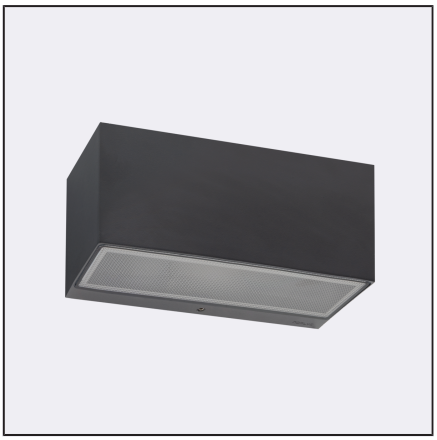

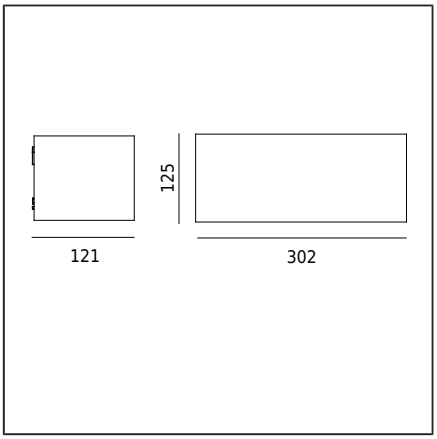

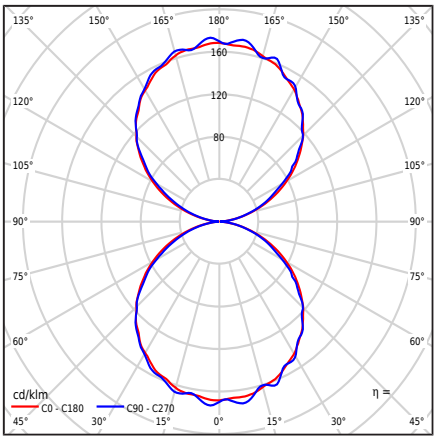

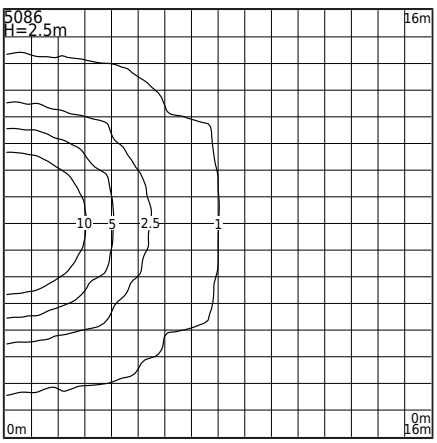

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A fixture with a wide range of applications, suitable for illuminating wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: intermediate plate with 2 adjustment holes 5x10mm, spacing 45mm, directly 2 holes ø5mm, spacing 68mm.
Terminal	Connection terminals: max 3x2.5mm², opportunity to loop the fixture max 3x1.5mm². Cable in a round sheath with diameter ø7...10.5mm.
Type of light source	LED module, DALI / TD electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Luminaire weight net / gross	2,62kg / 2,98kg
Box dimensions [cm]	34,5cm x 15cm x 17cm
Luminaire dimensions [cm]	30,2cm x 12,1cm x 12,5cm

Technical data

4 LED modules.	Philips Fortimo Strip 0,5ft MF FC LV6 4K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	17W
Luminaire wattage	19,3W
Lamp luminous flux	2740lm
Luminaire luminous flux	1942lm
Efficiency of the luminaire	100,6lm/W
ULOR	50%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
Power Factor luminaire	PF 0,95
THD factor	<10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- for a different luminous flux value
- for a different fixture color (according to the RAL color palette)
Terms of sale and other information can be agreed with the Sales Department of Norlys.

Inrush current	20A / 200µs

Maximum number of luminaires of this type per MCB:

B 10A: 10, B 16A: 30, C 10A: 31, C 16A: 51

Spare parts

ZS5086zx0010	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning installation, please review the instructions included with the fixture. Installation and service work is to be carried out by an individual with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is available upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not deteriorate the quality of the fixture.

ASKER BIG PRO 5086



Indexes

Index	Color	RAL
5086AL	ALUMINUM	9006
5086BL	BLACK	9005
5086GR	GRAPHITE	7016
5086WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before beginning installation, please review the instructions included with the fixture. Installation and service work is to be carried out by an individual with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is available upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not deteriorate the quality of the fixture.