


NORLYS ASKER BIG PRO 5087


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI2

Asker Big pro
5087XX0010
16.09.2026 v.10.13
www.norlys.no

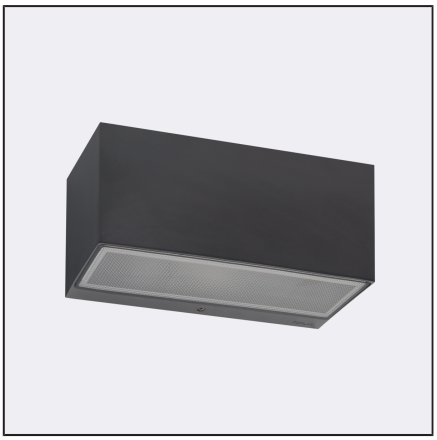

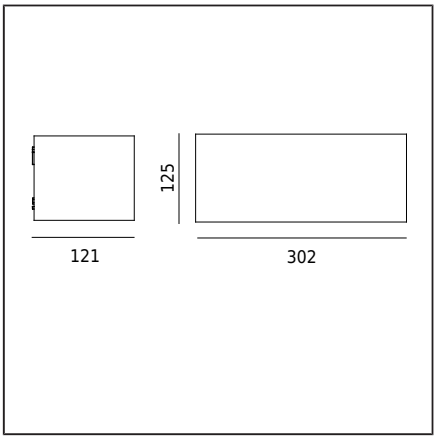

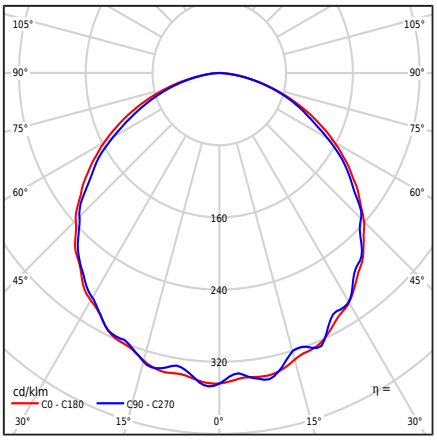

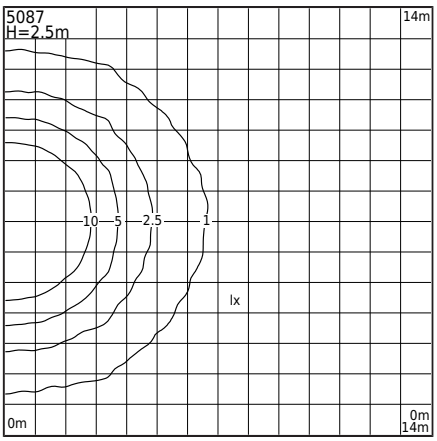

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Fixture with a wide range of applications, including lighting of wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: intermediate plate with 2 adjustment holes 5x10mm, spacing 45mm, directly 2 holes ø5mm, spacing 68mm.
Terminal	Connection terminals: max 5x2.5mm², possibility of connecting the fixture in a loop max 5x1.5mm². Cable in a round sheath with a diameter of ø7...10.5mm.
Type of light source	LED module, DALI / TD electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Luminaire weight net / gross	2,62kg / 2,98kg
Box dimensions [cm]	34,5cm x 15cm x 17cm
Luminaire dimensions [cm]	30,2cm x 12,1cm x 12,5cm

Technical data

2 LED modules	Philips Fortimo Strip 0,5ft MF FC LV6 4K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	8W
Luminaire wattage	10,2W
Lamp luminous flux	1303lm
Luminaire luminous flux	960lm
Efficiency of the luminaire	94,1lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
Power Factor luminaire	PF 0,95
THD factor	<10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- for a different light output value
- for a different fixture color (according to the RAL color palette)
Sales conditions and additional information available upon agreement with the Norlys Sales Department.

Inrush current	20A / 200µs

Maximum number of luminaires of this type per MCB:

B 10A: 10, B 16A: 30, C 10A: 31, C 16A: 51

Spare parts

ZS5087zx0009	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting installation, please read the instructions attached to the fixture. Installation and service work should be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon the client's request. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the quality deterioration of the fixture.

ASKER BIG PRO 5087

Indexes

Index	Color	RAL
5087AL	ALUMINUM	9006
5087BL	BLACK	9005
5087GR	GRAPHITE	7016
5087WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Before starting installation, please read the instructions attached to the fixture. Installation and service work should be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon the client's request. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the quality deterioration of the fixture.