


NORLYS VASA 5092


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI2

Vasa 5092XX0010
16.09.2026 v.10.10
www.norlys.no

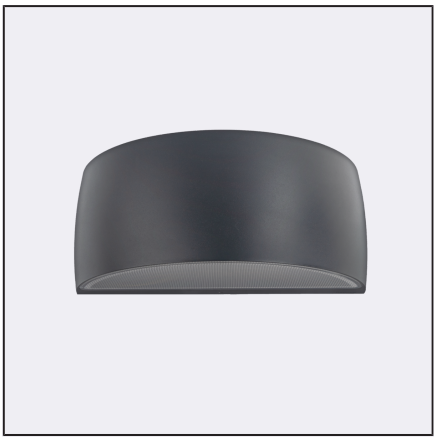

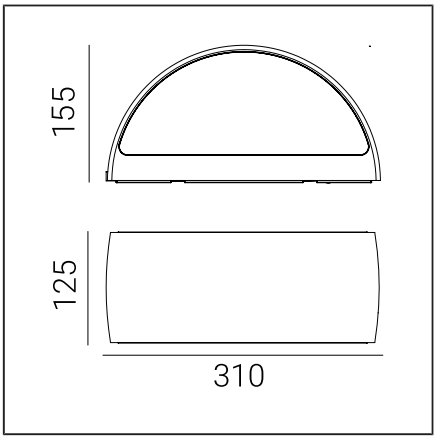

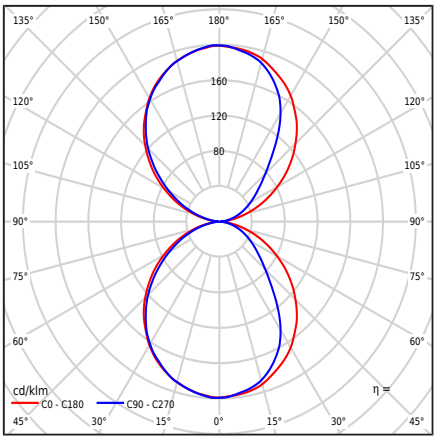

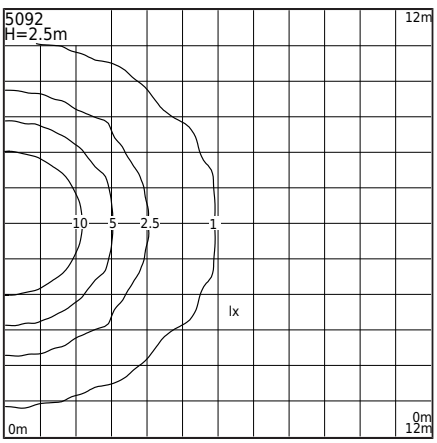

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A luminaire with a wide range of applications, for lighting: wall surfaces, facade and other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: intermediate plate, 2 adjustment holes 5x10mm, 45mm spacing, directly 2 ø5mm holes, 68mm spacing
Terminal	Connection terminals: max 5x2,5mm² Possibility to connect the luminaire in loops, max 5x1,5mm² Round insulated cable with a diameter of ø7...10,5mm
Type of light source	LED module, DALI / TD electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Luminaire weight net / gross	2,29kg / 2,65kg
Box dimensions [cm]	34,5cm x 15cm x 17cm
Luminaire dimensions [cm]	31cm x 12,5cm x 15,5cm

Technical data

2 LED modules	Philips Fortimo Strip 0,5ft MF FC LV6 4K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	8W
Luminaire wattage	14,1W
Lamp luminous flux	1303lm
Luminaire luminous flux	1039lm
Efficiency of the luminaire	73,7lm/W
ULOR	50%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
Power Factor luminaire	PF 0,95
THD factor	<10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- For the LED color 2700K [1/2]
- For a different value of the luminous flux
- For a different color of the fitting (according to the RAL color palette)

Terms of sale and other information, after contact with the Sales Department of Norlys

Inrush current	20A / 200µs
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 10, B 16A: 30, C 10A: 31, C 16A: 51

Spare parts

ZS5092zx0010	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM ArchiCAD

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information at the client's request. LED module replaceable by a person with appropriate qualifications, in accordance with applicable regulations.
Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

VASA 5092

Indexes

Index	Color	RAL
5092AL	ALUMINUM	9006
5092BL	BLACK	9005
5092GR	GRAPHITE	7016
5092WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information at the client's request. LED module replaceable by a person with appropriate qualifications, in accordance with applicable regulations.
Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire