

NORLYS ASKER BIG 5098


AC 220-240V 50-60Hz | IP 44 | IK 08 | LED

Asker big
5098XX0009
16.09.2026 v.09.8
www.norlys.no



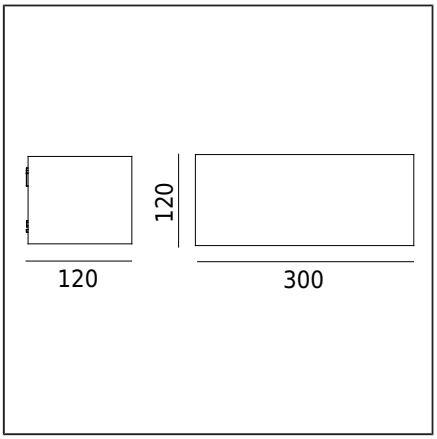

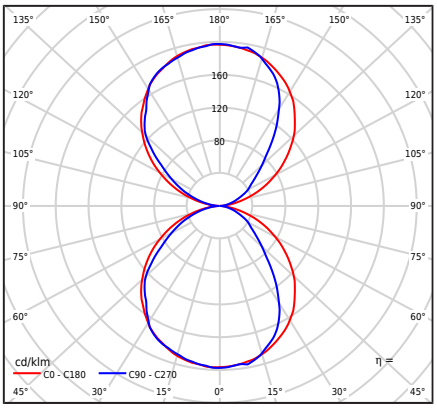

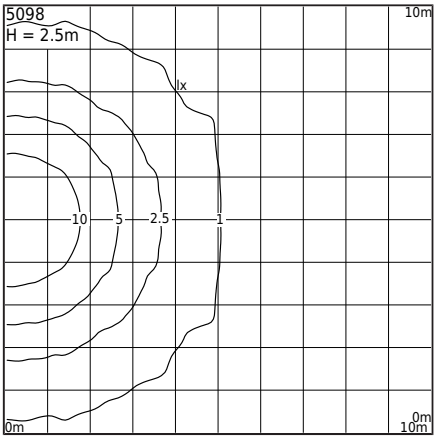

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	Luminaire with a wide range of applications, for illuminating wall surfaces and facades, as well as other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: intermediate plate with 2 adjustable holes 5x10mm spaced 45mm, directly 2 holes ø5mm, spaced 68mm.
Terminal	Connection terminals: max 3x2.5mm², capability to connect the fixture in a loop max 3x1.5mm². Cable in round sheathing with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	2,62kg / 2,98kg
Box dimensions [cm]	34,5cm x 15cm x 17cm

Technical data

2 LED modules	Philips LED Strip 0.5ft 550lm 840 FC LV4
Light source wattage	6,8W
Luminaire wattage	8,5W
Lamp luminous flux	1154lm
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Power Factor luminaire	PF>0,90
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
Optional version, deadline, and terms of execution in agreement with the Sales Department of Norlys Sp. z o.o.	
Inrush current	1,65A/16,5µs

Spare parts

46999610	Power supply.
46999615	LED module.

Files to download

Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5098GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, it is necessary to familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.