
NORLYS ASKER BIG 5099



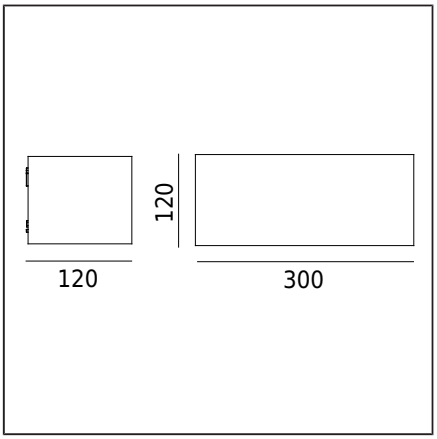

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	A fixture with a wide range of applications, suitable for illuminating wall surfaces, facades, and other architectural concepts.

General information

Materials	Front - hot-dip galvanized steel. Body - powder painted aluminum cast Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: intermediate plate with 2 adjustable holes 5x10mm spacing 45mm, directly 2 holes ø5mm, spacing 68mm.
Terminal	Connection terminals: max 3x2.5mm², possibility to loop-up the luminaire max 3x1.5mm². Cable in a round sheath with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply
Light control	Trailing edge (TE) dimming
Box dimensions [cm]	34,5cm x 15cm x 17cm

Technical data

LED module	Philips LED Strip 0.5ft 550lm 840 FC HV4
Driver	Yes
Light source wattage	3,9W
Luminaire wattage	5,2W
Lamp luminous flux	683lm
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
Inrush current	1A/15,2µs

Maximum number of luminaires of this type per MCB:

B 10A: 157, B 16A: 250, C 10A: 260, C 16A: 425

Spare parts

08120006	Gasket.
46999608	LED module.
46999746	Power supply.

Files to download

Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5099GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the assembly, please familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. The LED module can be replaced by a person with the appropriate qualifications, in accordance with current regulations. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.