

NORLYS HALDEN 510


AC 220-240V 50-60Hz | IP 65 | E27

Halden 510XX0009
14.10.2026 v.09.8
www.norlys.no



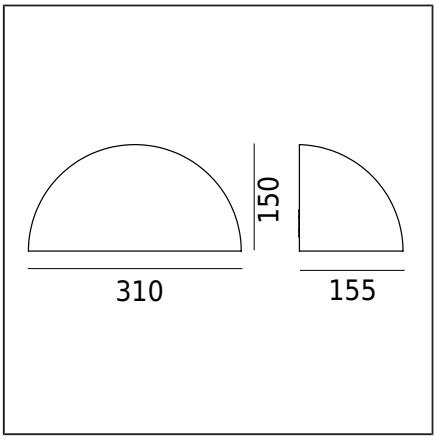

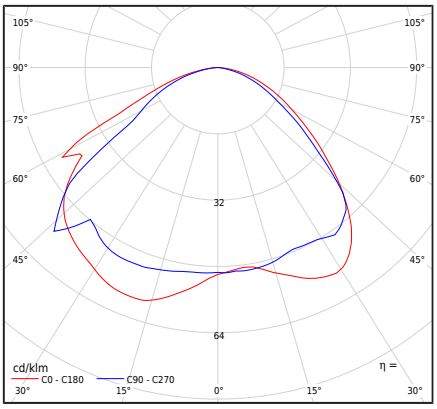

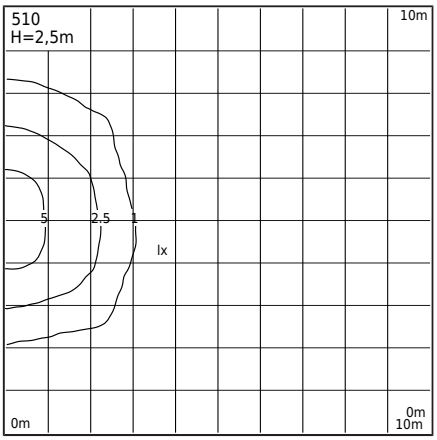

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Luminaire with a wide range of applications for example for illumination of walls and facade surfaces or any other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixing of the luminaire: mounting plate with 2 adjust holes 7x10mm, spacing 100mm.
Terminal	Connection terminals: max 3x2,5mm², possibility to connect luminaire in max 3x1,5mm². A round wire in the isolation with a diameter of ø7...10,5mm.
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	1,8kg / 2kg
Box dimensions [cm]	34cm x 17cm x 16,5cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
ULOR	0%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
BUG rating	B0-U1-G0

Spare parts

09012000001	Lampshade - service kit
63120003/ 63120004	Left/right gasket.
ZS510zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
510AL	ALUMINUM	9006
510GR	GRAPHITE	7016
510WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.