


NORLYS ASKER 5102


IP 65 | IK 08 | AC 220-240V 50-60Hz | LED | DIM

Asker 5102XX0017
13.10.2026 v.17.1
www.norlys.no

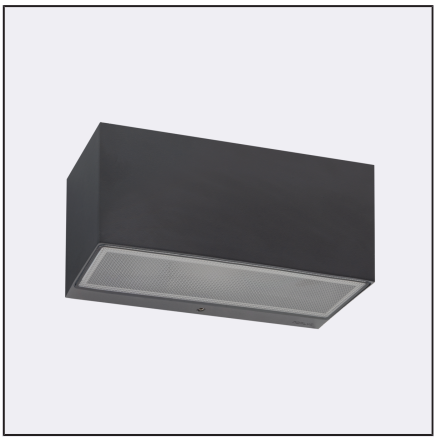

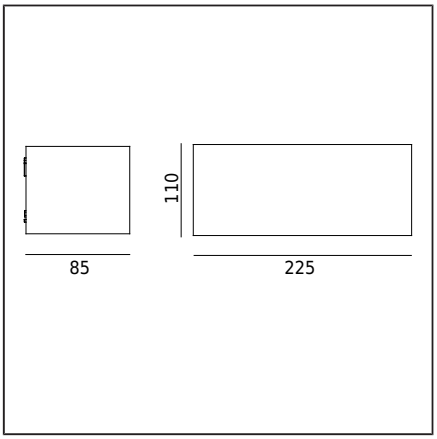

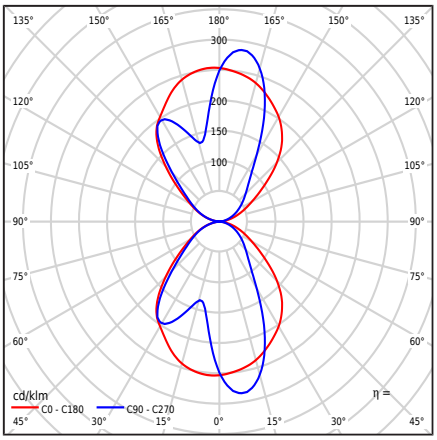

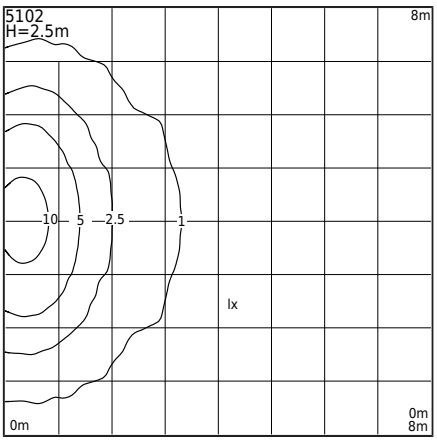

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A fixture with a wide range of applications, including lighting walls, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø4.5mm spacing 180x60mm
Terminal	Connection terminals: max 3x2.5mm², possibility of looping the fixture max 3x1.5mm². Round cable in a diameter of ø7...10.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	1,35kg / 1,48kg
Box dimensions [cm]	24,5cm x 12,5cm x 10,5cm
Luminaire dimensions [cm]	22,5cm x 8,5cm x 11cm

Technical data

LED module	Lumens EDC 57C 8W xxx 230V F201 4K (Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	8W
Luminaire wattage	8,8W
Luminaire luminous flux	329lm
ULOR	50%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Power Factor luminaire	PF 0,95
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class E / EPREL	
Inrush current	35mA / 60ms
BUG rating	B0-U3-G0

Spare parts

ZS5102zx0010	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5102AL	ALUMINUM	9006
5102BL	BLACK	9005
5102GR	GRAPHITE	7016
5102WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, be sure to read the instructions included with the fixture. Assembly and service work should be carried out by a person with the appropriate authorizations and qualifications in accordance with the applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.