


NORLYS ASKER BIG 5104


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Asker big
5104XX0010
16.09.2026 v.10.10
www.norlys.no

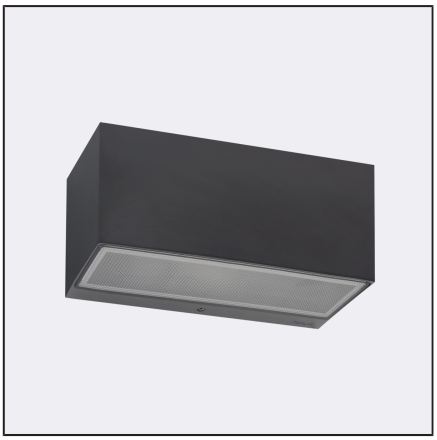

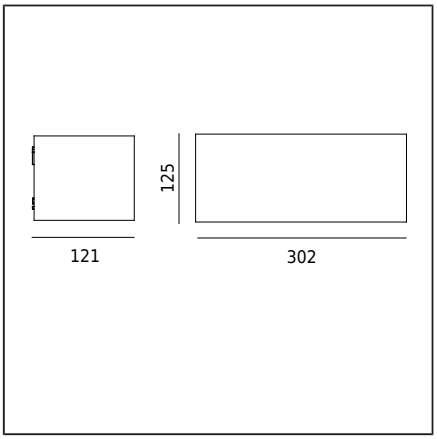

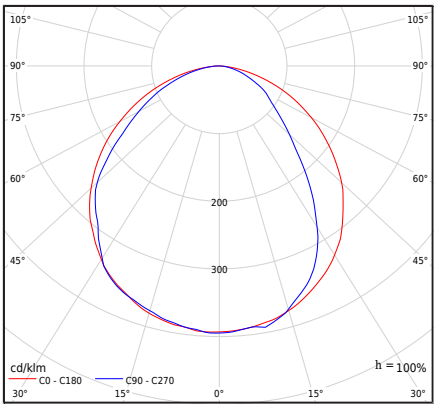

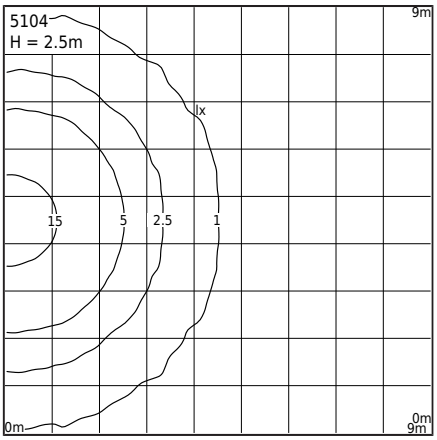

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Fixture with a wide range of applications, for illuminating wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: intermediate plate with 2 adjustable holes 5x10mm, spacing 45mm, directly 2 holes ø5mm, spacing 68mm.
Terminal	Connection terminals: max 3x2.5mm², possibility of connecting the fixture in a loop max 3x1.5mm². Cable in a round sheath with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	2,62kg / 2,98kg
Box dimensions [cm]	34,5cm x 15cm x 17cm

Technical data

LED module	Philips Strip 0.5ft 490lm 8xx FC HV5 (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	4W
Luminaire wattage	5,2W
Lamp luminous flux	681lm
Luminaire luminous flux	362lm
Efficiency of the luminaire	69,6lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class	C
BUG rating	B0-U0-G0

Spare parts

08120006	Gasket.
4699100101	LED module.
46999746	Power supply.

Files to download

Photometric IES files	Manual
Research report	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5104AL	ALUMINUM	9006
5104BL	BLACK	9005
5104GR	GRAPHITE	7016
5104WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting installation, please read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.