


NORLYS ASKER BIG PRO 5105


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Asker big pro
5105XX0010
16.09.2026 v.10.8
www.norlys.no

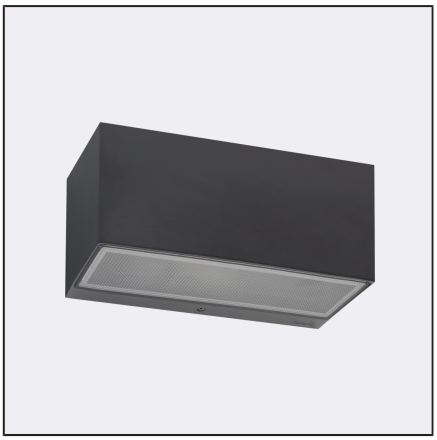

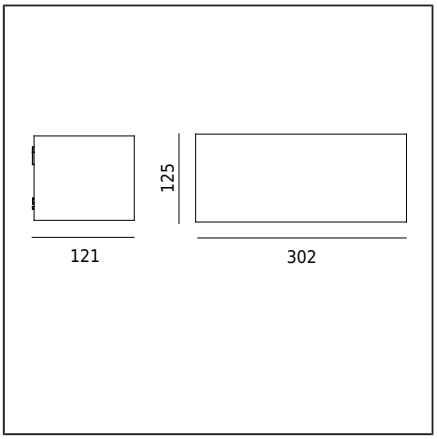

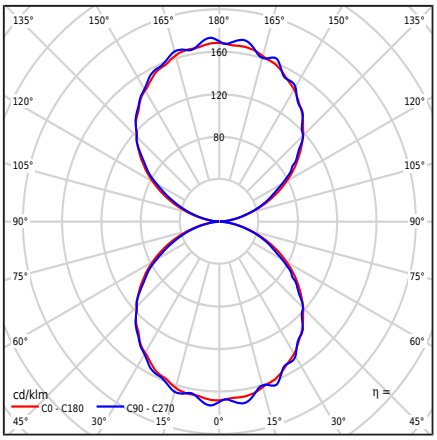

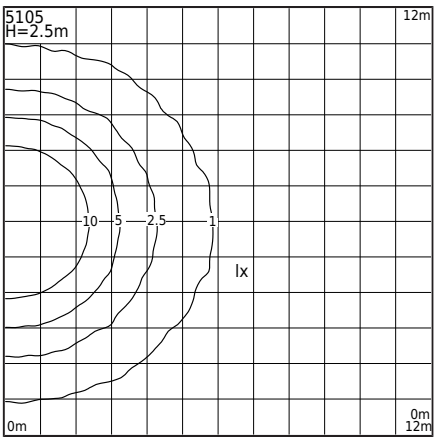

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	Fixture with a wide range of applications, for lighting wall surfaces and facades, as well as other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: intermediate plate with 2 adjustable holes 5x10mm, spacing 45mm, directly 2 holes ø5mm, spacing 68mm.
Terminal	Connection terminals: max 3x2.5mm², possibility to loop fixture connection max 3x1.5mm². Cable in circular insulation with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	2,62kg / 2,98kg
Box dimensions [cm]	34,5cm x 15cm x 17cm
Luminaire dimensions [cm]	30,2cm x 12,1cm x 12,5cm

Technical data

4 LED modules.	Philips Fortimo Strip 0,5ft MF FC LV6 4K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	11,6W
Luminaire wattage	13,7W
Lamp luminous flux	2108lm
Luminaire luminous flux	1313lm
Efficiency of the luminaire	95,8lm/W
ULOR	50%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
Power Factor luminaire	PF 0,90
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- for a different luminous flux value
- for a different fixture color (according to the RAL color palette)
Sales conditions and additional information are to be agreed with the Sales Department of Norlys.

BUG rating	B0-U4-G0

Spare parts

ZS5105zx0010	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning assembly, you should read the instructions attached to the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon client request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

ASKER BIG PRO 5105

Indexes

Index	Color	RAL
5105AL	ALUMINUM	9006
5105BL	BLACK	9005
5105GR	GRAPHITE	7016
5105WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning assembly, you should read the instructions attached to the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon client request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.