

NORLYS HITRA 5114


IP 65 | IK 06 | AC 220-240V 50-60Hz | LED | No Dim

Hitra 5114XX0009
02.11.2026 v.09.10
www.norlys.no



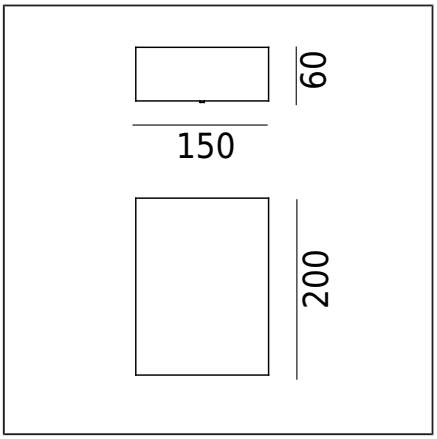

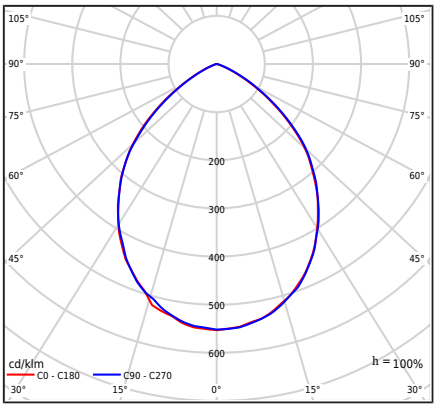

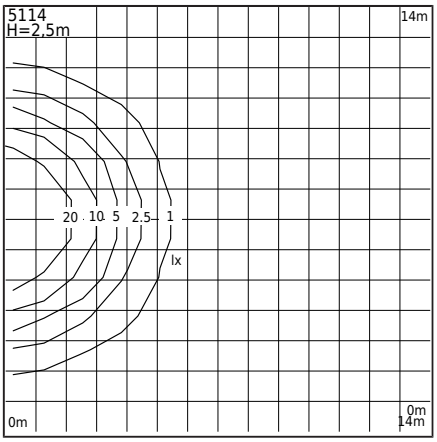

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	A luminaire with contemporary design. For lighting private areas and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lampshade - safety glass, transparent. Silicone gasket. EPDM cable gland.
Mounting method	Fixing of the luminaire: 2 holes ø4mm, spacing 104mm.
Terminal	Connection terminals: max 3x2,5mm², possibility to connect luminaire in loop max 3x1,5mm². A round wire in the isolation with a diameter ø7...10,5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Non-dimmable fixture
Luminaire weight net / gross	1,41kg / 1,58kg
Box dimensions [cm]	23cm x 16cm x 8cm
Luminaire dimensions [cm]	20cm x 15cm x 6cm

Technical data

LED module	Philips Fortimo DLM ES 1100/8xx G2 4K (Datasheet)
Light source wattage	9,5W
Luminaire wattage	9,5W
Lamp luminous flux	1150lm
Luminaire luminous flux	979lm
Efficiency of the luminaire	103,1lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF > 0,9
THD factor	< 30%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	2,98A / 34,07µs
BUG rating	B1-U1-G0

Accessories sold separately

151XX0009	Corner bracket

Spare parts

ZS5114zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM ArchiCAD

Indexes

Index	Color	RAL
5114AL	ALUMINUM	9006
5114GR	GRAPHITE	7016
5114WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.