


NORLYS HITRA 5115

Hitra 5115XX0009
02.11.2026 v.09.14
www.norlys.no



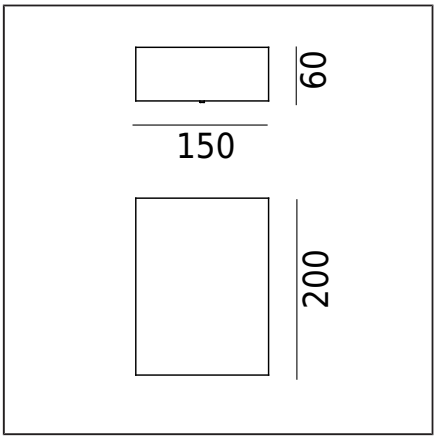

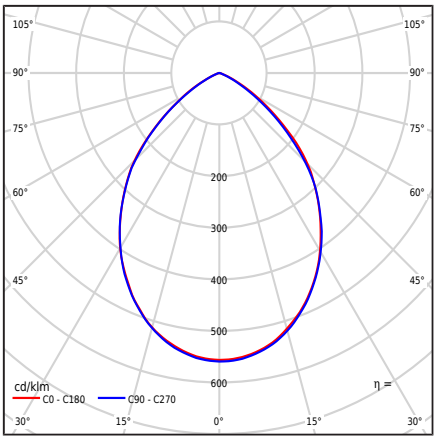

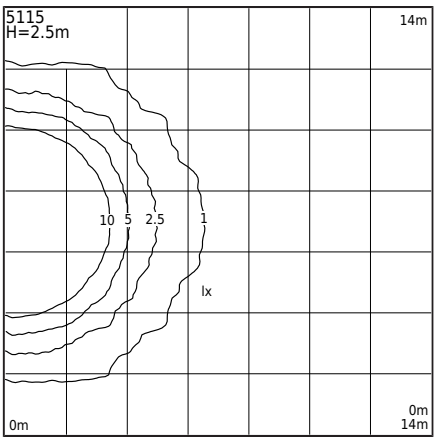

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Luminaire with contemporary design. For lighting private areas and other architectural concepts

General information

Materials	Powder painted aluminum cast. Lampshade - safety glass, transparent. Silicone gasket. EPDM cable gland.
Mounting method	Fixing the luminaire: 2 holes ø4mm, spacing 104mm. Other accessories must be purchased separately
Terminal	Connection terminals: max 3x2.5mm², Possibility to connect the luminaire in loops, max 3x1.5mm². Round insulated cable with a diameter of ø7 ... 10.5mm
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Non-dimmable fixture
Luminaire weight net / gross	1,41kg / 1,58kg
Box dimensions [cm]	23cm x 16cm x 8cm
Luminaire dimensions [cm]	20cm x 15cm x 6cm

Technical data

LED module	Philips Fortimo DLM ES 2000/8xx G2 4K (Datasheet)
Light source wattage	17,5W
Luminaire wattage	17,5W
Lamp luminous flux	2050lm
Luminaire luminous flux	1717lm
Efficiency of the luminaire	98,1lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF > 0,9
THD factor	< 30%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	3,01A/32,66µs
BUG rating	B1-U1-G0

Accessories sold separately

151XX0009	Corner bracket

Spare parts

ZS5115zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM ArchiCAD

Indexes

Index	Color	RAL
5115AL	ALUMINUM	9006
5115GR	GRAPHITE	7016
5115WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. LED module replaceable by a person with appropriate qualifications, following applicable regulations. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire