
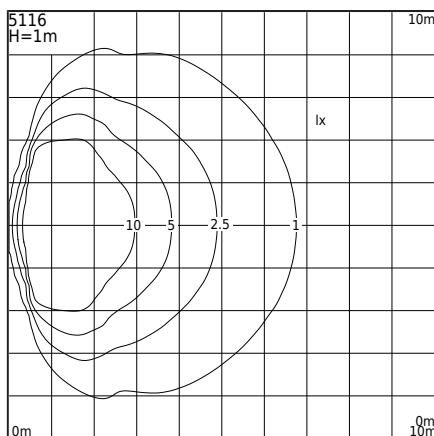
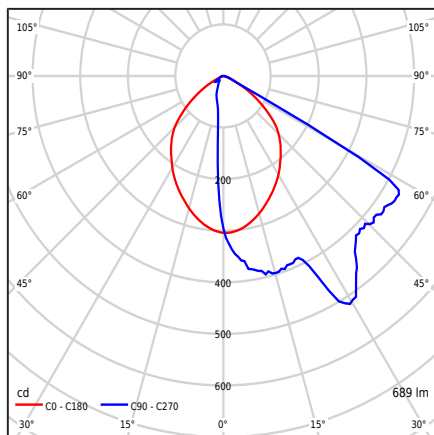


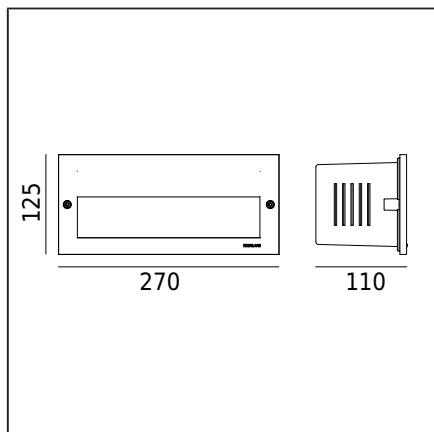

Type of luminaire

Type of luminaire	Recessed wall luminaire.
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Luminaire designed to illuminate stairs, steps, staircases, communication lines, ceiling illumination and many other architectural applications.

General information

Materials	Front - hot-dip galvanized steel. Body - powder painted aluminum cast Lens - safety glass, satin. Silicone gasket. EPDM cable gland.
Mounting method	Fixing of the luminaire: wall-mounted - hole 258x112x115, fixing in the layered wall - hole 235x96x82.
Terminal	Connection terminals: max 3x2,5mm ² , possibility to connect luminaire in loop max 3x1,5mm ² . A round wire in the isolation with a diameter of $\varnothing 7 \dots 10,5$ mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming

Technical data

LED module	Philips Strip 0.5ft 550lm 840 FC HV4
Driver	Yes
Light source wattage	4W
Luminaire wattage	5,2W
Luminaire luminous flux	689lm
Efficiency of the luminaire	132,5lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Power Factor luminaire	PF > 0,96
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
Inrush current	1A/15,2μs

Spare parts

46999608	LED module.
46999746	Power supply.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
5116GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.