

# NORLYS ASKER 5124


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DIM

Asker 5124XX0011
14.10.2026 v.11.14
www.norlys.no

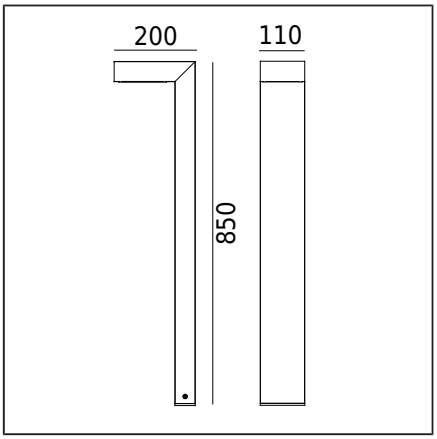

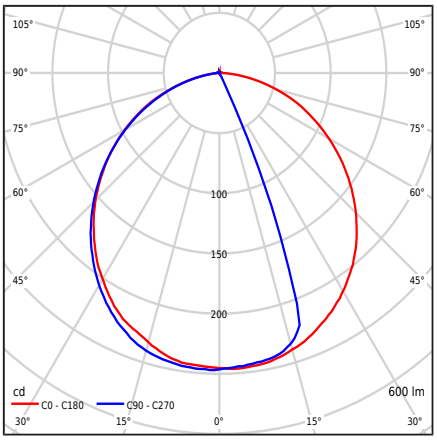


## Type of luminaire
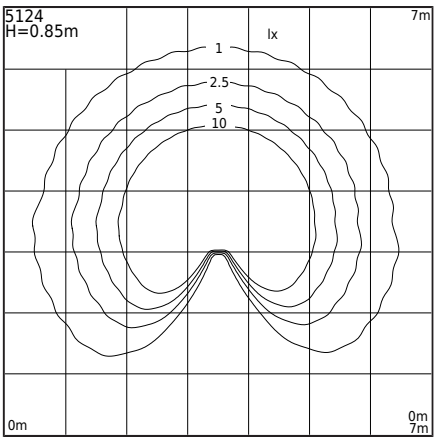
| | |
|---|---|
| Type of luminaire | Post light fixture. |
| Photometric body | Downward-directed light. |
| Characteristics of the luminaire | A fixture with contemporary design.<br>For illuminating gardens, private areas, and other architectural applications. |

## General information

| | |
|---|---|
| Materials | Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland. |
| Mounting method | Mounting the fixture: 4 holes ø8mm, spacing 18x50mm.<br>According to the included installation instructions.<br>Other accessories must be purchased separately. |
| Terminal | Connection terminals: max 3x2.4mm²,<br>possible loop-in connection of the fixture max 3x4mm².<br>Cable in a round sheath with a diameter: ø4...8mm; ø8...12mm or ø10...13.6mm. |
| Type of light source | LED module, electronic power supply<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | Trailing edge (TE) dimming |
| Luminaire weight net / gross | 4,01kg / 4,36kg |
| Box dimensions [cm] | 88cm x 23cm x 13cm |
| Luminaire dimensions [cm] | 85cm x 20cm x 11cm |

## Technical data

| | |
|---|---|
| LED module | Cree DK180501 V8 JB2835 3V 4K (Datasheet) |
| Driver | Yes |
| Driver durability | 50000h |
| External control | Philips Xitanium TE (User manual) |
| Light source wattage | 5,6W |
| Luminaire wattage | 7,2W |
| Lamp luminous flux | 1096lm |
| Luminaire luminous flux | 600lm |
| Efficiency of the luminaire | 83,3lm/W |
| ULOR | 0.6% |
| Color temperature | 4000K |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Flicker of light (Pst LM) | ≤1 |
| Strobe effect (SVM) | ≤0.4 |
| Colour rendering index CRI | 80 |
| L80TM-21 [wg LM-80] | 102 000h |
| L90 TM-21 [wg LM-80] | 52 600h |
| Power Factor luminaire | PF >0.9 |
| THD factor | 20% |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |

This product contains light source of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- in a different fixture color (according to the RAL color palette)
- in a different fixture height (not less than 55cm)

Terms of sale and other information can be discussed with the Norlys Sales Department.

| | |
|---|---|
| Inrush current | 1A / 15,2µs |
| BUG rating | B0-U1-G0 |

## Accessories sold separately

| | |
|---|---|
| 1907ZX0009 | Concreting anchor |
| 3090GA0009 | Mounting adapter |
| 1909GA0010 | Adapter for concrete foundation |
| 3081XX0009 | Mounting adapter |
| 1908GA0009 | Ground anchor |

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, one must read the manual attached to the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

# ASKER 5124



## Spare parts

| | |
|---|---|
| ZS4699101112 | Service set LED |
| ZS46999746 | Service set power supply |
| ZS5124zx0011 | Repair kit. |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | BIM Revit |
| BIM ArchiCAD | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| 5124AL | ALUMINUM | 9006 |
| 5124BL | BLACK | 9005 |
| 5124GR | GRAPHITE | 7016 |

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the installation, one must read the manual attached to the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.