


NORLYS ASKER POLE 5127

Asker pole
5127XX0010
16.09.2026 v.10.13
www.norlys.no



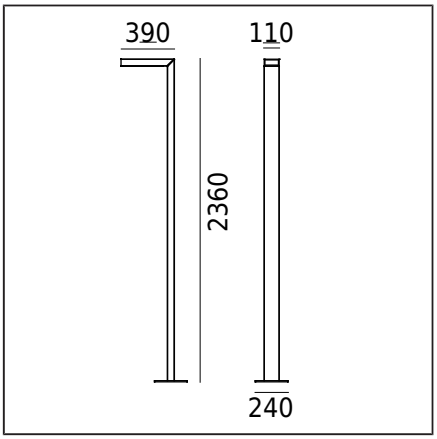

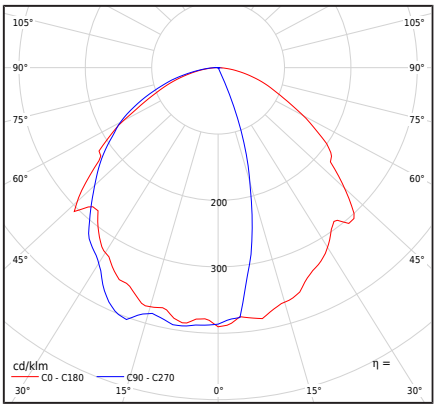

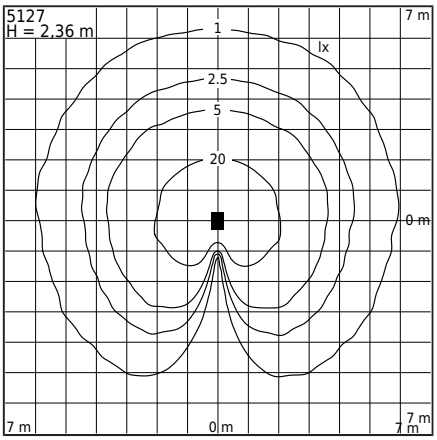

Type of luminaire

Type of luminaire	Pole luminaire (light construction).
Photometric body	Single-sided light: symmetrical, directed downward.
Characteristics of the luminaire	For lighting private areas and other concepts architectural

General information

Materials	Extruded aluminum profile, powder coated. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	Mounting of the luminaire: 4 holes ø12mm, spacing 200x200mm Art. 1363: 1 section pillar luminaire, Other accessories must be purchased separately
Terminal	Connection terminals: max 3x2.5mm², Possibility of connecting the luminaire in loops of max 3x2.5mm². Round insulated cable with a maximum diameter of ø12.5mm
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	11kg / 17,05kg
Box dimensions [cm]	26cm x 240cm x 53cm
Luminaire dimensions [cm]	11cm x 236cm x 39cm
Side area of luminaire	0,258m²

Technical data

2 LED modules	Lumens LNM/280X30/9W/840/230V
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	18W
Luminaire wattage	18W
Lamp luminous flux	1778lm
Luminaire luminous flux	1100lm
Efficiency of the luminaire	61,1lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Power Factor luminaire	PF 0,99
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
Inrush current	108,8mA/500µs

Accessories sold separately

117GA0009	Ground anchor
116ZX0009	Concreting anchor

Spare parts

06136000	Lampshade - service kit
08136000	Gasket.
46999389	LED module.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5127AL	ALUMINUM	9006
5127BL	BLACK	9005
5127GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. LED module replaceable by a person with appropriate qualifications, following applicable regulations. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire